



PHILIPS



Professional Lighting

Your **Vision.**
Our **Solutions.**

Effective 1st January, 2022

Signify

Proudly illuminating India
for more than 90 years

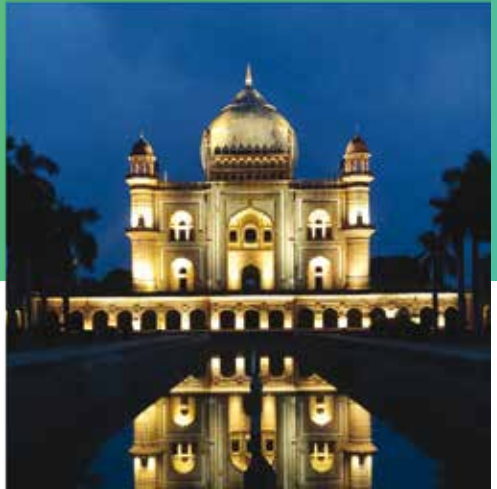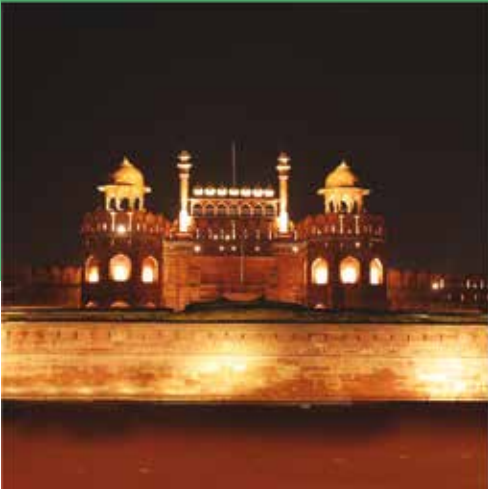



Signify is the world leader in lighting

Founded as Philips in Eindhoven, the Netherlands, we've led the lighting industry with innovations that serve professional and consumer markets for more than 127 years. In 2016, we spun off from Philips, becoming a separate publicly owned company, listed on Amsterdam's Euronext Stock Exchange. We were included in the benchmark AEX index in March 2018.



PHILIPS

Our global brand in professional and consumer lighting



interact

Our Internet of things platform and connected lighting systems



COLOR KINETICS

Our inspiring range of high-performance lights to uniquely light up the monuments

Signify proudly markets the best lighting brands in the world and is the world-leader in offering innovative products and sustainable lighting solutions in professional as well as consumer markets.

Contents

Indoor Commercial	8
Suspended-Surface Mounted Luminaires	10
Recessed Mounted Luminaires	17
Commercial Battens	25
Downlighters & Spotlights	27
Track & Spotlights	34
Cove Lights	37
Trunking	39
Indoor Industrial	40
Highbays	42
LED Bulkhead & WellGlass	47
Industrial Battens	49
Waterproof LED Luminaires	50
InteractPro	52
Outdoor	56
Street Lights	58
Interact City	64
Flood Lights	66
Interact Sports	72
Landscape Lighting	74
Tunnel Lights	83
Architectural Lighting	84
Uniflood	90
Solar Lighting	96
Smart Poles	104
Lighting Controls	106
In-house Software Suite	108
Disinfection UV-C Range	110
LED Lamps	113



Philips **LED lighting**

Leading the market today,
Transforming the future.



Philips has been designing, developing and manufacturing LED lighting products resulting in a far-reaching intellectual property portfolio and more than 20,000 time-tested installations. We have strengthened our leadership position and revenue generation in the LED Lighting market with solutions across segments, offices, retails, industries and public. We are leaders in technology and product performance in the LED lighting industry and are a confident choice of lighting specifiers across the globe.







Indoor Commercial

Suspended-Surface Mounted Luminaires

FlatLine

The FlatLine is a perfect blend of minimalism through its sleek design and maximalism through its wide profile making it apt for the Newgen open and cell offices. FlatLine offers a host of options like Office Compliant Version with special prismatic diffusers, options of 4ft and 8ft and up-down light distribution to meet the needs of the offices.



Type	HSN Code	MRP (INR)
SP570P LED26S 6500 PSU W12L120 OD SI	9405	12,000/-
SP570X LED22S 6500 PSU W12L120 OD SI	9405	12,000/-
SP570P LED26S 6500 PSU W12L120 OC SI	9405	13,000/-
SP570X LED22S 6500 PSU W12L120 OC SI	9405	13,000/-
SP571P LED33S 6500 PSU W12L120 OD SI	9405	14,000/-
SP571X LED27S 6500 PSU W12L120 OD SI	9405	14,000/-
SP571P LED33S 6500 PSU W12L120 OC SI	9405	15,000/-
SP571X LED27S 6500 PSU W12L120 OC SI	9405	15,000/-
SP570P LED52S 6500 PSU W12L240 OD SI	9405	24,000/-
SP570X LED44S 6500 PSU W12L240 OD SI	9405	23,000/-
SP570P LED52S 6500 PSU W12L240 OC SI	9405	24,000/-
SP570X LED44S 6500 PSU W12L240 OC SI	9405	24,000/-
SP571P LED66S 6500 PSU W12L240 OD SI	9405	28,000/-
SP571X LED54S 6500 PSU W12L240 OD SI	9405	27,000/-
SP571P LED66S 6500 PSU W12L240 OC SI	9405	29,000/-
SP571X LED54S 6500 PSU W12L240 OC SI	9405	29,000/-

Accessories		
Down End Cap		500/-
Up-Down End Cap		600/-
Suspension Kit		600/-
Joining Bracket		600/-
Single Driver Box		700/-
Double Driver Box		400/-

CCT options: 4000K and 6500K. Also available in DALI option (At additional INR 3000/- for 4ft and INR 5000/- for 8ft on MRP). Interact Office, Interact Pro and POE options also available on request.

PureLine Slim Surface & Suspended 60mm/75mm Width

Suspended 60mm/75mm width aluminium extruded linear lighting luminaires with superior white powder coated finish. Multiple options of light distribution, run lengths and lumen packages for different application to choose from.



Type	HSN Code	MRP (INR)
SP780 P LED52S-6500 PSU W6L224 OD SI	9405	24,000/-
SP780 P LED26S-6500 PSU W6L112 OD SI	9405	12,000/-
SP780P LED52S-6500 PSU W7L224 OD SI	9405	25,000/-
SP780 P LED33S-6500 PSU W7L112 OD SI	9405	12,500/-
SP780 X LED44S-6500 PSU W6L224 OD SI	9405	23,000/-
SP780 X LED52S-6500 PSU W6L224 OD SI	9405	23,000/-
SP780 X LED22S-6500 PSU W6L112 OD SI	9405	12,000/-
SP780 X LED26S-6500 PSU W6L112 OD SI	9405	12,000/-
SP780X LED11S-6500 PSU W6L56 OD SI	9405	7,700/-
SP780X LED46S-6500 PSU W7L224 OD SI	9405	24,000/-
SP780X LED52S-6500 PSU W7L224 OD SI	9405	24,000/-
SP780 X LED23S-6500 PSU W7L112 OD SI	9405	12,000/-
SP780 X LED26S-6500 PSU W7L112 OD SI	9405	12,000/-
SP781 P LED66S-6500 PSU W6L224 OD SI	9405	29,000/-
SP781 P LED33S-6500 PSU W6L112 OD SI	9405	15,000/-
SP781 X LED23S-6500 PSU W7L112 OD SI	9405	14,000/-
SP781 X LED27S-6500 PSU W7L112 OD SI	9405	14,500/-
SP781X LED46S-6500 PSU W7L224 OD SI	9405	30,000/-
SP781X LED54S-6500 PSU W7L224 OD SI	9405	30,000/-
SP781 X LED44S-6500 PSU W6L224 OD SI	9405	29,000/-
SP781 X LED54S-6500 PSU W6L224 OD SI	9405	29,000/-
SP781 X LED22S-6500 PSU W6L112 OD SI	9405	14,500/-
SP781 X LED27S-6500 PSU W6L112 OD SI	9405	14,500/-
End Plate SP780 EP60 GREY	9405	275/-
End Plate SP780 EP75 GREY	9405	275/-
ZPH780 N1000	9405	400/-
ZPH780 N1500	9405	450/-
ZPH780 N2000	9405	500/-
ZPH780 1MTR 3C 0.75sq mm Transparent cable	9405	300/-
ZPH780 1MTR 5C 0.75sq mm Transparent cable	9405	450/-

CCT options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

PureLine Slim Connector 60mm

PureLine Slim family can be conjoined in multiple way like L, +, T, Y etc.




Type	HSN Code	MRP (INR)
SP781X LED44S-6K PSU W6 SI L CONN 22X2	9405	On request
SP780X LED44S-6K PSU W6 SI L CONN 22X2	9405	On request
SP781X LED66S-6K PSU W6 SI T CONN 22X3	9405	On request
SP780X LED66S-6K PSU W6 SI T CONN 22X3	9405	On request
SP781X LED88S-6K PSU W6 SI P CONN 22X4	9405	On request
SP780X LED88S-6K PSU W6 SI P CONN 22X4	9405	On request

Available in DALI also At INR 2000/- additional on fixed output (PSU) MRP.

PureLine Taper

PureLine Taper is an elegant suspended lighting solution with taper end (bottom width of 60mm & top width of 50mm), it also has option of designer end caps which provide design inspiration through geometric patterns. Multiple option of light distribution, run lengths, color options & lumen pack for different application available.




Type	HSN Code	MRP (INR)
SP811P LED33S-6500 PSU W6L120 OD SI	9405	15,000/-
SP810P LED26S-6500 PSU W6L120 OD SI	9405	12,500/-
SP811X LED22S-6500 PSU W6L120 OD SI	9405	15,000/-
SP811X LED27S-6500 PSU W6L120 OD SI	9405	15,000/-
SP810X LED22S-6500 PSU W6L120 OD SI	9405	12,000/-
SP810X LED26S-6500 PSU W6L120 OD SI	9405	12,000/-
SP811P LED66S-6500 PSU W6L240 OD SI	9405	30,000/-
SP810P LED52S-6500 PSU W6L240 OD SI	9405	24,500/-
SP811X LED44S-6500 PSU W6L240 OD SI	9405	30,000/-
SP811X LED54S-6500 PSU W6L240 OD SI	9405	30,000/-
SP810X LED44S-6500 PSU W6L240 OD SI	9405	25,000/-
SP810X LED52S-6500 PSU W6L240 OD SI	9405	25,000/-
SP810 EP GR	9405	300/-
SP810 EP TAPER GR	9405	500/-

CCT options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.



PureLine Slim with Mirror Optics

Suspended aluminium extruded linear lighting luminaires with superior anodised finish and mirror optics for excellent glare control. Multiple options of light distribution, run lengths, and lumen packages for different application to choose from.



Type	HSN Code	MRP (INR)
SP781P LED27S-6500 PSU W6L112 C5 SI	9405	17,000/-
SP781P LED27S-4000 PSU W6L112 C5 SI	9405	17,000/-
SP780P LED26S-6500 PSU W6L112 C5 SI	9405	14,000/-
SP780P LED26S-4000 PSU W6L112 C5 SI	9405	14,000/-
SP781X LED23S-6500 PSU W6L112 C5 SI	9405	17,000/-
SP781X LED23S-4000 PSU W6L112 C5 SI	9405	17,000/-
SP780X LED22S-6500 PSU W6L112 C5 SI	9405	14,000/-
SP780X LED22S-4000 PSU W6L112 C5 SI	9405	14,000/-

CCT options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

PureLine Slim Suspended 50mm

Suspended 50mm aluminium extruded linear lighting luminaires with superior white powder coated finish. Multiple options of light distribution, run lengths and lumen packages for different application to choose from.



Type	HSN Code	MRP (INR)
SP780P LED52S-6500 PSU W5L226 OD WH	9405	13,782/-
SP780P LED26S-6500 PSU W5L113 OD WH	9405	6,791/-
SP780X LED52S-6500 PSU W5L226 OD WH	9405	19,000/-
SP780X LED44S-6500 PSU W5L226 OD WH	9405	13,582/-
SP780X LED26S-6500 PSU W5L113 OD WH	9405	9,500/-
SP780X LED22S-6500 PSU W5L113 OD WH	9405	6,691/-
SP780X LED12S-6500 PSU W5L56 OD WH	9405	4,594/-

CCT options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

PureLine Slim Connectors & Decorative Shapes 50mm

Recessed mounted 50mm aluminium extruded linear fixtures to align the linear lighting layout with the office architecture or create playful environments with shapes like square, hexagon, etc. Multiple options of light distribution, run lengths and lumen packages for different application to choose from.



Type	HSN Code	MRP (INR)
SP780P LED66S-6500 PSU W5 OD WH HX CONN	9405	27,000/-
SP780P LED48S-6500 PSU W5 OD WH X CONN	9405	19,250/-
SP780P LED44S-6500 PSU W5 OD WH SQ CONN	9405	16,000/-
SP780X LED48S-6500 PSU W5 OD WH + CONN	9405	24,500/-
SP780P LED36S-6500 PSU W5 OD WH Y CONN	9405	14,800/-
SP780X LED36S-6500 PSU W5 OD WH T CONN	9405	9,200/-
SP780X LED24S-6500 PSU W5 OD WH L CONN	9405	14,000/-

CCT options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

PureLine

Extruded aluminium suspended diffused office lighting solutions with up-down light distribution, available in standalone and continuous mounting versions in 4ft & 8ft run lengths.



Type	HSN Code	MRP (INR)
SP680P LED39S 6500 PSU WH L120 S1	9405	8,700/-
SP680X1 LED39S 6500 PSU WH L120 S1	9405	8,700/-
SP680X2 LED39S 6500 PSU WH L120 S1	9405	8,700/-
SP680P LED78S 6500 PSU WH L240 S1	9405	17,000/-
SP680X1 LED78S 6500 PSU WH L240 S1	9405	17,000/-
SP680X2 LED78S 6500 PSU WH L240 S1	9405	17,000/-
SP680P LED34S 6500 PSU WH L120 S1	9405	8,500/-
SP680X1 LED34S 6500 PSU WH L120 S1	9405	8,500/-
SP680X2 LED34S 6500 PSU WH L120 S1	9405	8,500/-
SP680P LED68S 6500 PSU WH L240 S1	9405	16,000/-
SP680X1 LED68S 6500 PSU WH L240 S1	9405	16,000/-
SP680X2 LED68S 6500 PSU WH L240 S1	9405	16,000/-

CCT options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

SmartBright Linear

SmartBright Linear provides an extremely durable and high efficacy yet cost effective linear solution surface mounted and suspended applications like offices, retail stores, metro stations, etc.



Type	HSN Code	MRP (INR)
SP095V LED40S 865 W7L120 PSU WH	9405	6,000/-
SP095V LED26S 865 W7L120 PSU WH	9405	5,500/-

CCT options of 5700K and 4000K at the same MRP. DALI option available on request at INR 2000/- additional on MRP.

SmartBright Surface

Low height general purpose suspended/surface mounted LED luminaire with diffused optics offering perfect illumination for indoor space.



Type	HSN Code	MRP (INR)
SM270C LED 30S 6500 PSU WH	9405	5,500/-
SM270C LED 30S 4000 PSU WH	9405	5,500/-

CCT options - 4000K, 6500K.

Cirrus Surface

Surface mounted general purpose square shaped luminaire with low height CRCA housing and high transmissivity diffuser suitable for office application. Available in options of white & grey housing with profiled & flat diffuser.



Type	HSN Code	MRP (INR)
SM365C LED32-6500 PSU OD GR	9405	5,500/-
SM365C LED32-6500 PSU OD WH	9405	5,500/-
SM366C LED32-6500 PSU OD GR	9405	5,500/-
SM366C LED32-6500 PSU OD WH	9405	5,500/-

CCT options - 4000K, 6500K.



Cirrus Mini Pro

Cirrus Mini Pro is a general lighting application luminaire (with a dimension of 312mm X 312mm), a perfect solution for all surface mount indoor general lighting application.



Type	HSN Code	MRP (INR)
SM200C LED16S 6500 PSU OD WH	9405	3,100/-
SM200C LED15S 4000 PSU OD WH	9405	3,100/-
SM200C LED11S 6500 PSU OD WH	9405	2,450/-
SM200C LED10S 4000 PSU OD WH	9405	2,450/-

CCT options: 4000K, 6500K.



Recessed Mounted Luminaires

DaySpace Recessed

DaySpace is a unique 2'X2' LED luminaire suitable for grid ceiling. With options of using the false ceiling tile or back plate of users choice the fixture seamlessly blends into the office environment/architecture and also declutters the ceiling with its unique design.




Type	HSN Code	MRP (INR)
RC740B LED25S/865 W60L60 PSU WH	9405	13,500/-
RC740B LED30S/865 W60L60 PSU WH	9405	14,500/-
RC740B LED36S/865 W60L60 PSU WH	9405	15,500/-
RC740B LED25S/865 W60L60 PSD WH	9405	19,000/-
RC740B LED30S/865 W60L60 PSD WH	9405	20,000/-
RC740B LED36S/865 W60L60 PSD WH	9405	21,000/-

BP740 L60W60 WH - White back plate as an optional additional accessory. CCT options: 4000K, 6500K, 5700K. Available in DALI also At INR 2000/- additional on fixed output (PSU) MRP.

DaySpace Suspended

DaySpace is a unique 2'X2' LED luminaire suitable for grid ceiling. With options of using the false ceiling tile or back plate of users choice the fixture seamlessly blends into the office environment/ architecture and also declutters the ceiling with its unique design.




Type	HSN Code	MRP (INR)
SP740B LED25S/865 W60L60 PSU WH	9405	17,000/-
SP740B LED30S/865 W60L60 PSU WH	9405	18,000/-
SP740B LED36S/865 W60L60 PSU WH	9405	19,000/-
SP740B LED25S/865 W60L60 PSD WH	9405	22,000/-
SP740B LED30S/865 W60L60 PSD WH	9405	23,000/-
SP740B LED36S/865 W60L60 PSD WH	9405	24,000/-

CCT options: 4000K, 6500K, 5700K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

PowerBalance

Aluminium extruded recessed luminaire with 135mm diffused compartment available both in standalone & continuous options suitable for armstrong techzone ceiling.

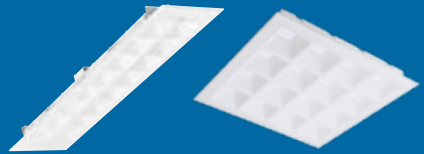

Type	HSN Code	MRP (INR)
RC600B M LED25S-6500 PSU W30L120 WH	9405	11,500/-
RC600B M LED30S-6500 PSU W30L120 WH	9405	12,000/-
RC600B M LED40S-6500 PSU W30L120 WH	9405	12,500/-
RC600B M LED25S-6500 PSD W30L120 WH	9405	14,000/-
RC600B M LED30S-6500 PSD W30L120 WH	9405	14,500/-
RC600B M LED40S-6500 PSD W30L120 WH	9405	15,200/-
RC600B M LED25S-6500 PSU W60L60 WH	9405	11,000/-
RC600B M LED30S-6500 PSU W60L60 WH	9405	11,500/-
RC600B M LED40S-6500 PSU W60L60 WH	9405	12,000/-
RC600B M LED25S-6500 PSD W60L60 WH	9405	14,500/-
RC600B M LED30S-6500 PSD W60L60 WH	9405	15,000/-
RC600B M LED40S-6500 PSD W60L60 WH	9405	15,500/-

CCT options: 4000K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP. IAO and POE options also available on request.

WingLine

Recessed mounted general purpose square shaped luminaire with high transmittivity diffuser suitable for office application. Available in options of white & grey housing with profiled & flat diffuser.



Type	HSN Code	MRP (INR)
RC480B LED25S/865 W60L60 PSU WH	9405	4,800/-
RC480B LED30S/865 W60L60 PSU WH	9405	4,800/-

CCT options: 4000K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP. IAO and IAP options also available on request.

CoreView

A unique recessed mounted 2'X2' LED luminaire suitable for grid ceiling with 100% indirect lighting, delivering soft and uniform light for excellent visual comfort.




Type	HSN Code	MRP (INR)
RC 420B M LED 30S 6500 PSU WH	9405	6,000/-
RC 420B M LED 34S 6500 PSU WH	9405	6,500/-
RC 420B M LED 30S 6500 PSD WH	9405	7,000/-
RC 420B M LED 34S 6500 PSD WH	9405	7,500/-

CCT options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

FullGlow G6

Full Glow G6 comes with an all new deep drawn housing general illumination applications. Our carefully designed driver with ripple <5% ensures a flicker-free product designed for better health and wellbeing. Full Glow G6 also comes with a long service life and almost complete freedom from maintenance significantly reduce operating costs.



Type	HSN Code	MRP (INR)
RC380B LED25S-6500 G6 L60W60 PSU OD	9405	4,000/-
RC380B LED30S-6500 G6 L60W60 PSU OD	9405	4,400/-
RC380B LED36S-6500 G6 L60W60 PSU OD	9405	4,800/-
RC380B LED42S-6500 G6 L60W60 PSU OD	9405	5,200/-

CCT options: 4000K, 5700K, 6500K. Also available in DALI option (At additional INR 4500/- on MRP). Interact Office, Interact Pro and POE options also available on request



SoftGlow

Office compliant fully diffused recessed mounted 2'X2' LED Troffer with microprismatic diffuser suitable for indoor spaces.



Type	HSN Code	MRP (INR)
RC380B LED36S-6500 G5 L60W60 PSU OD SG	9405	5,800/-
RC380B LED30S-6500 G5 L60W60 PSU OD SG	9405	5,600/-
RC380B LED36S-6500 G5 L60 W60 PSD OD OC	9405	9,000/-

CCT options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

SmartGlow

SmartGlow is an intelligent office lighting recessed luminaire with built in PIR occupancy sensor offering flexibility of auto switching off when the space is not occupied.



Type	HSN Code	MRP (INR)
RC383B LED 36S-6500 PSU OD WH PIR	9405	6,000/-
RC383B LED 28S-6500 PSU OD WH PIR	9405	6,000/-
RC383B LED 36S-4000 PSU OD WH PIR	9405	6,000/-
RC383B LED 28S-4000 PSU OD WH PIR	9405	6,000/-

Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

FullGlow Essential

Fully diffused recessed mounted 2'X2' LED luminaire with high transmittive diffuser suitable for indoor spaces.



Type	HSN Code	MRP (INR)
RC360B LED30S-6500 V1 L60W60 PSU OD	9405	3,000/-
RC360B LED36S-6500 V1 L60W60 PSU OD	9405	3,200/-

CCT options: 4000K and 6500K

RC370 G6

Fully diffused recessed mounted 2'X2' LED luminaire with high transmittive diffuser suitable for indoor spaces.



Type	HSN Code	MRP (INR)
RC370B LED30S-6500 G6 L60W60 PSU OD S6	9405	4,200/-
RC370B LED36S-6500 G6 L60W60 PSU OD S6	9405	4,500/-

CCT options: 4000K and 6500K

PureLine TechZone G2

PureLine TechZone is offered in two versions suitable for 150mm & 100mm technical zones. Sturdy extruded aluminium housing with sliding PC diffuser offering uniform lighting distribution. CRCA endcaps and external gear for ease of maintenance.



Type	HSN Code	MRP (INR)
RC810B LED26S 6500 PSU W10L120 OD WH	9405	7,900/-
RC810B LED30S 6500 PSU W10L120 OD WH	9405	7,900/-
RC810X LED20S 6500 PSU W10L120 OD WH	9405	7,900/-
RC810B LED52S 6500 PSU W10L240 OD WH	9405	15,300/-
RC810X LED40S 6500 PSU W10L240 OD WH	9405	15,800/-
RC810B LED26S 6500 PSU W15L120 OD WH	9405	9,100/-
RC810B LED30S 6500 PSU W15L120 OD WH	9405	9,100/-
RC810X LED20S 6500 PSU W15L120 OD WH	9405	9,100/-
RC810B LED52S 6500 PSU W15L240 OD WH	9405	18,200/-
RC810X LED40S 6500 PSU W15L240 OD WH	9405	18,500/-

Accessories

RC810 W10 Endplate		250/-
RC810 W15 Endplate		350/-
RC810 W10L120 Accessory Diffuser		300/-
RC810 W10L240 Accessory Diffuser		350/-
RC810 W15L120 Accessory Diffuser		450/-
RC810 W15L240 Accessory Diffuser		500/-

CCT options: 4000K, 5700K and 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP. Interact Office, Interact Pro and POE options also available on request.

PureLine TechZone

Aluminium extruded recessed luminaire with 135mm diffused compartment available both in standalone & continuous options suitable for armstrong techzone ceiling.




Type	HSN Code	MRP (INR)
RC820B LED 26S 6500 PSU W15L120 OD SI	9405	8,000/-
RC820B LED 26S 4000 PSU W15L120 OD SI	9405	8,000/-
RC820B LED 52S 4000 PSU W15L240 OD SI	9405	16,000/-
RC820B LED 52S 4000 PSU W15L240 OD SI	9405	16,000/-

CCT options: 4000K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP. Microprismatic diffuser also available on request at additional price.

PureLine Slim Recessed 60mm/75mm

Recessed 60mm/75mm width aluminium extruded linear lighting luminaires with superior anodised aluminium finish. Multiple options of light distribution, run lengths and lumen packages for different application to choose from.



Type	HSN Code	MRP (INR)
RC780B LED52S-6500 PSU W7L240 OD SI	9405	23,000/-
RC780B LED52S-6500 PSU W6L240 OD SI	9405	22,000/-
RC780X LED44S-6500 PSU W7L240 OD SI	9405	23,000/-
RC780X LED44S-6500 PSU W6L240 OD SI	9405	22,000/-
RC780B LED26S-6500 PSU W7L120 OD SI	9405	11,700/-
RC780B LED26S-6500 PSU W6L120 OD SI	9405	11,200/-
RC780X LED22S-6500 PSU W7L120 OD SI	9405	11,700/-
RC780X LED22S-6500 PSU W6L120 OD SI	9405	11,000/-
RC780 EP60 Grey	9405	250/-
RC780 EP75 Grey	9405	250/-

CCT options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP. PSD (DALI), IAO, TWH & POE options also available on request.

PureLine Slim Recessed 50mm

Recessed mounted 50mm aluminium extruded linear lighting luminaires with superior white powder coated finish. Multiple options of light distribution, run lengths and lumen packages for different application to choose from.



Type	HSN Code	MRP (INR)
RC780B LED52S-6500 PSU W5L226 OD WH	9405	15,000/-
RC780B LED26S-6500 PSU W5L113 OD WH	9405	7,800/-
RC780X LED12S-6500 PSU W5L56 OD WH	9405	4,800/-
RC780X LED22S-6500 PSU W5L113 OD WH	9405	7,600/-
RC780X LED26S-6500 PSU W5L113 OD WH	9405	7,700/-
RC780X LED44S-6500 PSU W5L226 OD WH	9405	14,600/-
RC780X LED52S-6500 PSU W5L226 OD WH	9405	14,700/-

CCT options: 4000K, 5700K, 6500K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

FullGlow 1'x4'

Fully diffused recessed mounted 1'X4' LED luminaire with high transmittive diffuser suitable for indoor spaces.



Type	HSN Code	MRP (INR)
RC380B LED30S-6500 G5 L3W12 PSU OD	9405	6,500/-
RC380B LED36S-6500 G5 L3W12 PSU OD	9405	7,500/-
RC380B LED43S-6500 G5 L3W12 PSU OD	9405	8,500/-

CCT options: 4000K, 6500K, 5700K. Available in DALI also at INR 2000/- additional on fixed output (PSU) MRP.

GreenSquare

General purpose recessed mounted 2'X2' LED luminaire with central light exit and profiled CRCA housing for better and soothing light distribution.



Type	HSN Code	MRP (INR)
RC140B LED30S-6500 PSU WH OD	9405	4,400/-
RC140B LED30S-4000 PSU WH OD	9405	4,400/-
RC140B LED30S-6500 PSD WH OD	9405	5,400/-
RC140B LED30S-4000 PSD WH OD	9405	5,400/-
RC140B LED30S-6500 PSR WH OD	9405	5,400/-
RC140B LED30S-4000 PSR WH OD	9405	5,400/-

Cirrus

Recessed mounted general purpose square shaped luminaire with high transmittivity diffuser suitable for office application. Available in options of white & grey housing with profiled & flat diffuser.



Type	HSN Code	MRP (INR)
RC365 LED33-6500 PSU OD GR	9405	4,800/-
RC365 LED33-6500 PSU OD WH	9405	4,800/-
RC366B LED33-6500 PSU OD GR	9405	4,800/-
RC366B LED33-6500 PSU OD WH	9405	4,800/-

CCT options: 4000K, 6500K



Commercial Battens

SmartBright Xtra S4

Industrial Batten SmartBright BN100 S4 expands the application scope of BN100 Batten family with upgraded specification and additional features ensuring sustained lighting performance in harsh conditions. This all new S4 version is available in IP40 ingress rating and THD<10%.



Type	HSN Code	MRP (INR)
BN100C LED40S-6500 PSU L120 GR S4	9405	2,500/-
BN100C LED20S-6500 PSU L120 GR S4	9405	2,400/-

CCT options: 4000K and 6500K

SmartBright

Extruded aluminium batten available in 2ft & 4ft run length with multiple lumen packages and suitable for surface, wall & conduit mounting (with accessories).



Type	HSN Code	MRP (INR)
BN 021 LED12S 6500 PSU GR	9405	570/-
BN021C LED22S PSU CW GR	9405	850/-
BN 021 LED40S- 6500 PSU GR (4 ft)	9405	1,499/-

Also available in 4000K

SmartBright Xtra

Extruded aluminium batten for continuous operation and available in 4ft run length, suitable for surface, wall & conduit mounting (with accessories).



Type	HSN Code	MRP (INR)
BN100C LED40S-6500 PSU L120 GR	9405	1,800/-

Also available in 4000K

Essential SmartBright Batten

Essential SmartBright is a Lightweight and screw-less linear batten with high efficacy for modern commercial applications. The luminaire comprises of extruded aluminium housing offering superior finish, long life and high transitivity polycarbonate diffuser resulting in high efficacy and uniform lighting.



Type	HSN Code	MRP (INR)
BN170C LED40S-6500 PSU L120	9405	1,700/-
BN170C LED20S-6500 PSU L120	9405	1,100/-

CCT options: 4000K and 6500K.

Downlighters & Spotlights

GreenSpace Flex

GreenSpace Flex is a modular range of downlighters, with extremely low glare (UGR <19). The range is available in narrow (15°), medium (24°) & wide beam (38°) optics, suitable for different applications & ceiling heights.



Type	HSN Code	MRP (INR)
Trims		
RS378Z M102 D150 R-R AJU	9405	4,500/-
RS378Z M87 D130 R-R AJ D	9405	4,000/-
RS378Z M87 D110 R-R FX D	9405	2,700/-
RS378Z M87 D130 R-R AJ	9405	3,600/-
RS378Z M70 D110 R-R AJ D	9405	3,400/-
RS378Z M70 D90 R-R FX D	9405	2,000/-
RS378Z M70 D110 R-R AJ	9405	3,100/-
RS378Z M55 D60 R-R FX	9405	1,400/-
RS378Z M55 D75 R-R FX	9405	1,500/-
RS378Z M55 D75 R-U AJ	9405	1,500/-
RS378Z M55 D75 R-R AJ PH	9405	1,500/-
RS378Z M55 D75 R-R FX PH	9405	1,600/-
RS378Z M55 D75 R-R FX SPH	9405	1,600/-
RS378Z M55 D75 S-S FX WP	9405	1,600/-
RS378Z M55 D70 R-R AJ	9405	1,600/-
RS378Z M55 D75 S-U AJ	9405	1,600/-
RS378Z M55 D75 S-S FX	9405	1,600/-
RS378Z M55 D70 S-R AJ	9405	1,700/-
RS378Z M55 D75 R-R AJ Trim	9405	1,700/-
RS378Z M55 D75 R-U AJ Trim	9405	1,700/-
RS378Z M55 D75 R-R FX PH WP	9405	1,500/-
RS378Z M55 D75 R-R AJ	9405	1,800/-
RS378Z M55 D90 R-R AJ	9405	2,000/-
RS378Z M55 D90 S-R AJ	9405	2,000/-
RS378Z M55 D85 R-R AJ	9405	2,300/-
RS378Z M55 D95 R-R AJ	9405	2,400/-
RS378Z M55 D95 R-R AJ D	9405	2,500/-
RS378Z M55 D78 S-S AJ D	9405	2,800/-
RS378Z M55 D78 R-R AJ D	9405	2,800/-
RS378Z M55 D78 R-R FX D	9405	2,800/-
RS378Z M55 D92 R-R AJ D	9405	3,200/-
RS378Z M55 D92 R-R FX D	9405	3,200/-

Also available in 4000K

Type	HSN Code	MRP (INR)
Trims		
RS378Z M55 D102 R-R AJ D	9405	3,500/-
RS378Z M55 D102 R-R FX D	9405	3,600/-
RS378B MR16 D102 R-R AJ D	9405	4,100/-
RS378B MR16 D102 R-R FX D	9405	4,100/-
RS378B MR16 D78 R-R AJ D	9405	3,700/-
RS378B MR16 D78 R-R FX D	9405	3,700/-
RS378B MR16 D78 S-S AJ D	9405	3,300/-
RS378B MR16 D92 R-R AJ D	9405	3,400/-
RS378B MR16 D92 R-R FX D	9405	3,300/-

Type	HSN Code	MRP (INR)
LED Modules		
RS378B P6 927 PSU-E MB M55	9405	3,000/-
RS378B P6 927 PSU-E NB M55	9405	3,700/-
RS378B P6 927 PSU-E WB M55	9405	4,800/-
RS378B P6 930 PSU-E MB M55	9405	7,000/-
RS378B P6 930 PSU-E NB M55	9405	7,800/-
RS378B P6 930 PSU-E WB M55	9405	9,800/-

Nomenclature for LED modules Pxy=xy Watts (P6=6W). CCT options of 2700K, 3000K & 4000K available with 90CRI in all LED modules. Options of NB, MB and WB available in all LED modules

LuxSpace Pro

LuxSpace Pro is a deep recessed downlighter range with extremely low glare (UGR <19) & high quality faceted reflector for superior lighting and aesthetics. The range is available in medium (32°) & wide beam (65°) optics for both standard and high ceiling applications.



Type	HSN Code	MRP (INR)
DN590B M LED6S-6500 PSU WH WB	9405	4,000/-
DN590B M LED6S-6500 PSU WH MB	9405	4,000/-
DN590B M LED10S-6500 PSU WH WB	9405	4,150/-
DN590B M LED10S-6500 PSU WH MB	9405	4,150/-
DN590B M LED15S-6500 PSU WH WB	9405	4,300/-
DN590B M LED15S-6500 PSU WH MB	9405	4,300/-
DN590B M LED20S-6500 PSU WH WB	9405	4,500/-
DN590B M LED20S-6500 PSU WH MB	9405	4,500/-

CCT options - 3000K, 4000K, 5700K & 6500K. Available in DALI also at INR 3500/- additional on fixed output (PSU) MRP. MB and WB options available for all lumen packs. Tunable white, Interact Pro, POE and IP54 options also available on request.

GreenPerform Sleek

GreenPerform Sleek is a high performance low-height LED downlighter suited for requirements of any modern professional workspace. Robust PDC housing ensures long system. Narrow rim renders a pleasing aesthetic look.



Type	HSN Code	MRP (INR)
DN295B LED6S-6500 PSU WH	9405	1,400/-
DN295B LED8S-6500 PSU WH	9405	1,550/-
DN295B LED10S-6500 PSU WH	9405	1,700/-
DN296B LED12S-6500 PSU WH	9405	2,100/-
DN296B LED15S-6500 PSU WH	9405	2,500/-
DN296B LED20S-6500 PSU WH	9405	3,000/-

CCT options: 4000K, 5700K, 3000K. Available in DALI also At INR 3500/- additional on fixed output (PSU) MRP. Office compliant variant with UGR<19 - Soft Glow (SG). (MRP-INR 500/- additional for SG option).

GreenPerform Sleek G2

GreenPerform Sleek is a high performance low-height LED downlighter suited for requirements of any modern professional workspace. Robust PDC housing ensures long system. Narrow rim renders a pleasing aesthetic look.



Type	HSN Code	MRP (INR)
DN295B LED6S-6500 PSE WH S1	9405	1,400/-
DN295B LED10S-6500 PSE WH S1	9405	1,700/-
DN296B LED12S-6500 PSE WH S1	9405	2,100/-
DN296B LED15S-6500 PSE WH S1	9405	2,500/-
DN296B LED20S-6500 PSE WH S1	9405	3,000/-

CCT options: 4000K, 5700K, 3000K.

ArchSpace

ArchSpace is the perfect choice when it comes to surface and suspended cylindrical downlighting applications such as those in retail, offices, hotels, lobbies and school/universities etc. With its differentiated aesthetics with extruded aluminium housing and a superior powder coated finish, multiple choices of lumen packs, two diameters, flexible height*, uniform lighting distribution and superior features of driver make ArchSpace an undisputed winner when it comes to the surface/cylindrical downlight category.



Type	HSN Code	MRP (INR)
SP320P LED6S-6500 PSU DIA100 WH	9405	4,100/-
SP320P LED10S-6500 PSU DIA100 WH	9405	4,300/-
SP320P LED15S-6500 PSU DIA100 WH	9405	4,600/-
SP320P LED20S-6500 PSU DIA100 WH	9405	4,800/-
SP320P LED6S-6500 PSU DIA80 WH	9405	3,800/-
SP320P LED10S-6500 PSU DIA80 WH	9405	4,100/-
SP320P LED15S-6500 PSU DIA80 WH	9405	4,300/-
SP320P LED20S-6500 PSU DIA80 WH	9405	4,600/-

Available in black housing color at the same MRP. Available in CCT options of 3000K, 4000K and 6500K at the same MRP

ArchSpace Pro

ArchSpace PRO comes with huge benefits such as differentiated aesthetics, multiple choices of lumen packs, 3 types of optical distribution suitable for different applications, both surface and suspended mounting options and power packed by superior performance features like 50K burning hours, THD<10%, Dali dimmable option and EMI/EMC compliance, which make the Product Robust and Reliable for all kind of Projects.



Type	HSN Code	MRP (INR)
SP321P LED20S-5700 PSU NB DIA100 WH	9405	6,000/-
SP321P LED15S-5700 PSU NB DIA100 WH	9405	5,800/-
SP321P LED10S-5700 PSU ENB DIA100 WH	9405	5,600/-
SM321P LED20S-5700 PSU NB DIA100 WH	9405	6,000/-
SM321P LED15S-5700 PSU NB DIA100 WH	9405	5,800/-
SM321P LED10S-5700 PSU ENB DIA100 WH	9405	5,600/-

CCT options of 3000K, 4000K & 5700K. DALI option at INR 4,800/- extra on MRP for fixed output. Beam Angle options of 24°, 36°, 60°

Sleek Surface Downlight

Slim profile surface mounted downlight with options of 700 to 2000 lumen.



Type	HSN Code	MRP (INR)
SM250C LED7S- 6500 PSU WH	9405	1,100/-
SM250C LED12S- 6500 PSU WH	9405	1,200/-
SM251C LED16S- 6500 PSU WH	9405	1,750/-
SM250C LED12S- 6500 PSU WH	9405	1,200/-
SM251C LED20S- 6500 PSU WH	9405	1,950/-

Available in Round and Square form factors in 3000K and 4000K.

GreenLED Ultima Square

Ultra sleek recessed downlight for low height false ceiling in square profile.



Type	HSN Code	MRP (INR)
DN096B LED6S-6500 PSU WH	9405	1,580/-
DN097B LED10S-6500 PSU WH	9405	1,980/-

Also available in 3000K and 4000K

GreenLED Ultima Round

Ultra sleek recessed downlight for low height false ceiling in round profile.



Type	HSN Code	MRP (INR)
DN091B LED6S-6500 PSU WH	9405	1,580/-
DN092B LED10S-6500 PSU WH	9405	1,980/-

Also available in 3000K and 4000K

Sky COB

- Tiltable spotlight with decorative finish
- Bright (80 Lm/watt) Spotlight to ensure focused beam at the desired place
- Longer life: 20000 Hrs long life
- Ideal for retails showrooms, hospitality, and offices.



Type	HSN Code	MRP (INR)
7W Sky COB Tilt LED Spotlight (WW)	9405	1,500/-
7W Sky COB Tilt LED Spotlight (NW)	9405	1,500/-
7W Sky COB Tilt LED Spotlight (CDL)	9405	1,500/-
12W Sky COB Tilt LED Spotlight (WW)	9405	2,000/-
12W Sky COB Tilt LED Spotlight (NW)	9405	2,000/-
12W Sky COB Tilt LED Spotlight (CDL)	9405	2,000/-
18W Sky COB Tilt LED Spotlight (WW)	9405	3,000/-
18W Sky COB Tilt LED Spotlight (NW)	9405	3,000/-
18W Sky COB Tilt LED Spotlight (CDL)	9405	3,000/-

GreenLED I

- High performance LED Downlights for commercial applications
- 100 lumen/watt efficacy
- Efficient heat sink (die cast) with steel clips
- Integrated driver control (for easy installation)



Type	HSN Code	MRP (INR)
DN191B LED6S-3000 PSU WH S2	9405	1,415/-
DN191B LED6S-4000 PSU WH S2	9405	1,415/-
DN191B LED6S-6500 PSU WH S2	9405	1,415/-
DN192B LED10S-3000 PSU WH S2	9405	1,765/-
DN192B LED10S-4000 PSU WH S2	9405	1,765/-
DN192B LED10S-6500 PSU WH S2	9405	1,765/-
DN193B LED12S-3000 PSU WH S2	9405	2,200/-
DN193B LED12S-4000 PSU WH S2	9405	2,200/-
DN193B LED12S-6500 PSU WH S2	9405	2,200/-
DN194B LED16S-3000 PSU WH S2	9405	2,750/-
DN194B LED16S-4000 PSU WH S2	9405	2,750/-
DN194B LED16S-6500 PSU WH S2	9405	2,750/-
DN195B LED20S-3000 PSU WH S2	9405	3,300/-
DN195B LED20S-4000 PSU WH S2	9405	3,300/-
DN195B LED20S-6500 PSU WH S2	9405	3,300/-

Green LED Plus

- 100Lm/watt bright and efficient light output
- Life class of 30k hours
- PDC housing for enhanced life and continuous operation
- Wide options to choose from versions: 750lm/7.5W, 1250lm/12.5W, 1500lm /15W and 1800lm /18W.



Type	HSN Code	MRP (INR)
DN171 7.5S LED DL G2 (WW)	9405	945/-
DN171 7.5S LED DL G2 (NW)	9405	945/-
DN171 7.5S LED DL G2 (CDL)	9405	945/-
DN172 12.5S LED DL G2 (WW)	9405	1240/-
DN172 12.5 S LED DL G2 (NW)	9405	1240/-
DN172 12.5S LED DL G2 (CDL)	9405	1240/-
DN172 15S LED DL G2 (WW)	9405	1310/-
DN172 15S LED DL G2 (NW)	9405	1310/-
DN172 15S LED DL G2 (CDL)	9405	1310/-
DN172 18S LED DL G2 (WW)	9405	1370/-
DN172 18S LED DL G2 (NW)	9405	1370/-
DN172 18S LED DL G2 (CDL)	9405	1370/-
DN176 7.5S LED DL G2 (WW)	9405	945/-
DN176 7.5S LED DL G2 (NW)	9405	945/-
DN176 7.5S LED DL G2 (CDL)	9405	945/-
DN177 12.5S LED DL G2 (WW)	9405	1240/-
DN177 12.5 S LED DL G2 (NW)	9405	1240/-
DN177 12.5S LED DL G2 (CDL)	9405	1240/-
DN177 15S LED DL G2 (WW)	9405	1310/-
DN177 15S LED DL G2 (NW)	9405	1310/-
DN177 15S LED DL G2 (CDL)	9405	1310/-
DN177 18S LED DL G2 (WW)	9405	1370/-
DN177 18S LED DL G2 (NW)	9405	1370/-
DN177 18S LED DL G2 (CDL)	9405	1370/-



Track & Spotlights

TrueFashion Tracks

TrueFashion is a dedicated spot family answering to the specific needs of fashion retailers. These miniaturized spots with clean and fine detailing offer contemporary design and blend seamlessly into the store interior. TrueFashion provides the best quality of light by using lenses to optimize the contrasts within the store.



Type	HSN Code	MRP (INR)
ST700T LED10 930PW PSD VLC NB WH IN	9405	18,500/-
ST700T LED20 940PW PSD VLC MB WH IN	9405	18,500/-
ST700T LED20 930PC PSU NB 1C WH IN	9405	7,900/-
ST700T LED20 930PC PSU MB 1C WH IN	9405	7,900/-
ST700T LED20 930PC PSU WB 1C WH IN	9405	7,900/-
ST700T LED30 930PC PSU MB 1C WH IN	9405	9,600/-
ST700T LED30 930PC PSU WB 1C WH IN	9405	9,600/-
ST700T LED40 930PC PSU MB 1C WH IN	9405	10,000/-
ST700T LED40 930PC PSU WB 1C WH IN	9405	10,000/-
ST700T LED20 930PC PSU MB 1C WH HB IN	9405	7,900/-
ST700T LED40 930PC PSU MB 1C WH HB IN	9405	11,000/-
ST700T LED30 930PW PSU MB 3C WH IN	9405	9,000/-
ST700T LED30 930PW PSU WB 3C WH IN	9405	9,000/-
ST700T LED30 930PW PSD VLC MB WH IN	9405	18,500/-
ST700T LED30 930PW PSD VLC WB WH IN	9405	18,500/-
ST700T LED10 930PC PSU NB 1C WH IN	9405	8,400/-
ST700T LED10 930PC PSU MB 1C WH IN	9405	8,400/-
ST700T LED10 930PC PSU WB 1C WH IN	9405	8,400/-

Housing color options of white and black. DALI and VLC options also for specific SKUs.

EcoAccent Track

Track mounted accent lighting luminaire in pressure diecast housing with two options of lumen pack. Track of 1M and 2M available to be ordered separately.



Type	HSN Code	MRP (INR)
ST271T LED20/830 PSU-E NB 1C BK	9405	6,500/-
ST271T LED20/830 PSU-E MB 1C BK	9405	6,500/-
ST271T LED20/830 PSU-E WB 1C BK	9405	6,500/-
ST271T LED20/840 PSU-E MB 1C BK	9405	6,500/-
ST271T LED20/850 PSU-E MB 1C BK	9405	6,500/-
ST271T LED20/830 PSU-E MB 1C WH	9405	6,500/-
ST271T LED20/840 PSU-E MB 1C WH	9405	6,500/-
ST271T LED20/840 PSU-E WB 1C BK	9405	6,500/-
ST271T LED20/850 PSU-E WB 1C BK	9405	6,500/-
ST271T LED20/840 PSU-E NB 1C BK	9405	6,500/-
ST271T LED40/830 PSU-E NB 1C BK	9405	7,000/-
ST271T LED40/830 PSU-E WB 1C BK	9405	7,000/-
ST271T LED40/840 PSU-E NB 1C BK	9405	7,000/-
ST271T LED40/840 PSU-E MB 1C BK	9405	7,000/-
ST271T LED40/840 PSU-E WB 1C BK	9405	7,000/-
ST271T LED40/850 PSU-E MB 1C BK	9405	7,000/-
ST271T LED40/850 PSU-E WB 1C BK	9405	7,000/-
ST271T LED40/840 PSU-E MB 1C WH	9405	7,000/-
ST271T LED40/830 PSU-E MB 1C WH	9405	7,000/-
ST271T LED40/850 PSU-E NB 1C BK	9405	7,000/-

EcoAccent

Recessed mounted accent lighting luminaire with diecast aluminium heat sink and sand grain finishing reflector, available in two lumen packs with option of DALI dimmable driver.



Type	HSN Code	MRP (INR)
RS271B LED20/830 PSU-E NB WH	9405	6,500/-
RS271B LED20/830 PSU-E MB WH	9405	6,500/-
RS271B LED20/830 PSU-E WB WH	9405	6,500/-
RS271B LED20/840 PSU-E NB WH	9405	6,500/-
RS271B LED20/840 PSU-E MB WH	9405	6,500/-
RS271B LED20/840 PSU-E WB WH	9405	6,500/-
RS271B LED20/850 PSU-E NB WH	9405	6,500/-
RS271B LED20/850 PSU-E MB WH	9405	6,500/-
RS271B LED20/850 PSU-E WB WH	9405	6,500/-
RS271B LED40/830 PSU-E MB WH	9405	6,500/-
RS271B LED40/830 PSU-E WB WH	9405	6,500/-
RS271B LED40/840 PSU-E MB WH	9405	6,500/-
RS271B LED40/840 PSU-E WB WH	9405	6,500/-
RS271B LED40/850 PSU-E MB WH	9405	6,500/-
RS271B LED40/850 PSU-E WB WH	9405	6,500/-
RS271B LED20/850 PSD NB WH	9405	7,500/-
RS271B LED20/840 PSD NB WH	9405	7,500/-
RS271B LED20/830 PSD NB WH	9405	7,500/-
RS271B LED20/850 PSD MB WH	9405	7,500/-
RS271B LED20/840 PSD MB WH	9405	7,500/-
RS271B LED20/830 PSD MB WH	9405	7,500/-
RS271B LED20/850 PSD WB WH	9405	7,500/-
RS271B LED20/840 PSD WB WH	9405	7,500/-
RS271B LED20/830 PSD WB WH	9405	7,500/-
RS271B LED40/850 PSD MB WH	9405	8,000/-
RS271B LED40/840 PSD MB WH	9405	8,000/-
RS271B LED40/830 PSD MB WH	9405	8,000/-
RS271B LED40/850 PSD WB WH	9405	8,000/-
RS271B LED40/840 PSD WB WH	9405	8,000/-
RS271B LED40/830 PSD WB WH	9405	8,000/-



Cove Lights

FlexCove G4

FlexCove G4 LED Strip is the professional solution, ideal for application in retail, hospitality & offices. Available in IP20 & IP44 versions, with long system life of 30,000 burning hours. Mounting accessories including Al channel, PC diffuser, leader cable & mounting clips available for order separately. *Driver to be ordered separately.



Type	HSN Code	MRP (INR)
LED Strips		
LS170S LED4 827 IP20 L5000	9405	2,800/-
LS170S LED8 827 IP20 L5000	9405	3,000/-
LS170S LED12 827 IP20 L5000	9405	3,200/-
LS170S LED16 827 IP20 L5000	9405	3,500/-
LS170S LED4 827 IP44 L5000	9405	3,400/-
LS170S LED8 827 IP44 L5000	9405	3,600/-
LS170S LED12 827 IP44 L5000	9405	3,800/-
LS170S LED16 827 IP44 L5000	9405	4,400/-
LS170S LED4 927 IP20 L5000	9405	3,000/-
LS170S LED8 927 IP20 L5000	9405	3,200/-
LS170S LED12 927 IP20 L5000	9405	3,400/-
LS170S LED16 927 IP20 L5000	9405	4,000/-
LS170S LED4 927 IP44 L5000	9405	3,600/-
LS170S LED8 927 IP44 L5000	9405	3,800/-
LS170S LED12 927 IP44 L5000	9405	4,200/-
LS170S LED16 927 IP44 L5000	9405	4,600/-
LS170S LED9 TNW IP44 L5000	9405	11,000/-
LS170S LED10 TNW IP44 L5000	9405	6,400/-

Type	HSN Code	MRP (INR)
Mounting Accessories		
AC170Z PC-OP L1000		300/-
AC170Z TR-U L1000		400/-
AC170Z TR-V L1000		500/-
AC170Z PC-OP L1000 TW		300/-
AC170Z TR-U L1000 TW		400/-
AC170Z TR-V L1000 TW		500/-
AC170Z Mounting Clip		40/-
AC170Z Mounting Clip WP		40/-
AC170Z End Cap		20/-
AC170Z End Cap TW		20/-
AC170Z Connector		100/-
AC170Z Connector TW		100/-
AC170Z Connector with Leader Cable L		100/-
AC170Z Connector with Leader Cable H		100/-
AC170Z Connector with Leader Cable TW		100/-

CCT options with CRI80 - 2400K, 2700K, 4000K, 6500K in both IP20 and IP44. CCT options with CRI90 - 2400K only in IP20 and IP44. Tunable white option in IP44

SkyCove LED Strip

New 5 meter LED Strip especially designed for commercial use.

- Ideal for retail showrooms, hospitality & offices
- Driver included in pack (24W output)
- Long life with 20,000 hours
- Available in 3000K & 6500K



Type	HSN Code	MRP (INR)
LED Strip SKYCove 5M WW with driver	9405	1,660/-
LED Strip SKYCove 5M CDL with driver	9405	1,660/-
LED Strip SKYCove 5M NW with driver	9405	1,660/-

SKY PRO LED Strip

5 meter LED Strip especially designed for profile use.

- Uniform brightness with 700 lumens/meter
- Superior adhesive for easy and worry-free installation
- Available in WW, NW & CW




Type	HSN Code	MRP (INR)
Sky Pro 168 LED /Mtr w/o driver (WW)	9405	2,150/-
Sky Pro 168 LED /Mtr w/o driver (NW)	9405	2,150/-
Sky Pro 168 LED /Mtr w/o driver (CDL)	9405	2,150/-



Trunking

Optimus LED Trunking


Trunking based solution for large open areas with high ceiling requiring continuous linear installation. Luminaire is snap fit mount on trunking system, available in two lumen packs. Accessories need to be additionally ordered.



Type	HSN Code	MRP (INR)
LL199X 1XDLED40-6500 PSE OD WH S1	9405	4,500/-
LL199X 1XDLED40-4000 PSE OD WH S1	9405	4,500/-
LL199X 1XDLED40-3000 PSE OD WH S1	9405	4,500/-
LL199X 1XDLED57-3000 PSE OD WH	9405	6,200/-
LL199X 1XDLED57-4000 PSE OD WH	9405	6,200/-
LL199X 1XDLED57-6500 PSE OD WH	9405	6,200/-
TTX199/03LED	9405	3,000/-
TTX199/01 LED	9405	1,000/-
ZTX199 BC LED	9405	350/-
ZTX200 SMS	9405	600/-
ZTX200 EP	9405	120/-

Also available in IP54 version on request.



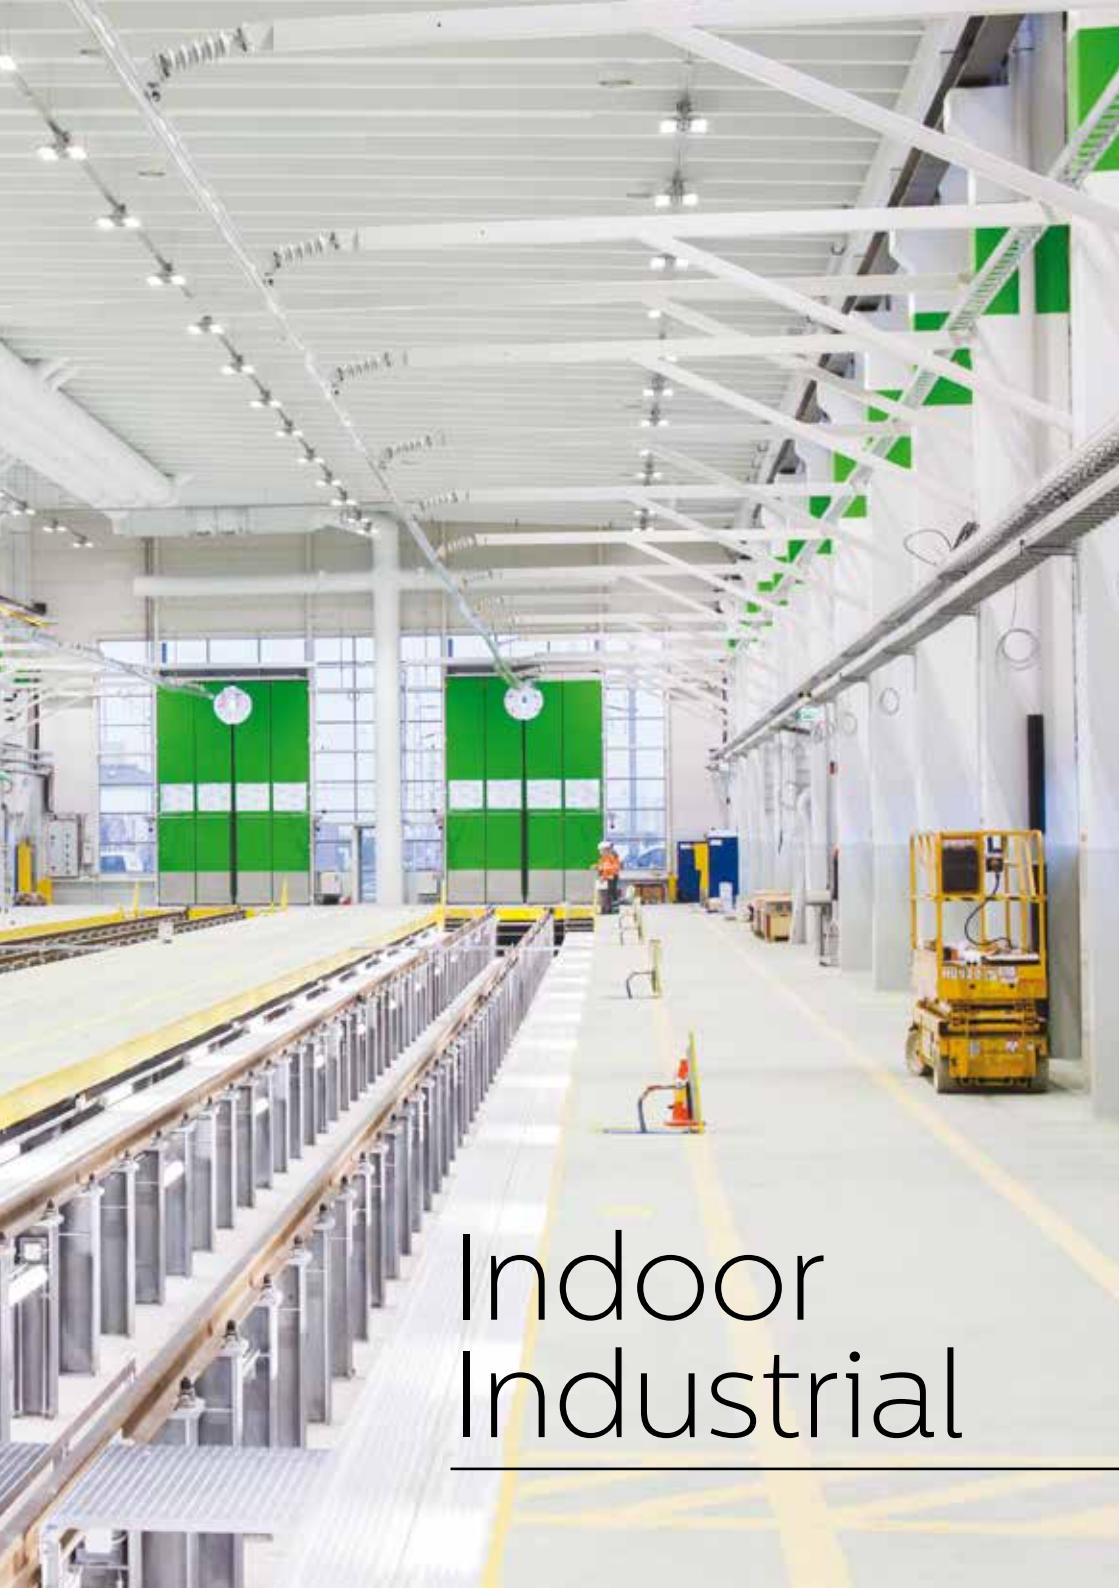

Indoor
Industrial



Highbays

GreenPerform Prime

GreenPerform Prime is a new age highbay range that offers an industry leading efficacy of 150 Lm/W specially designed to deliver unmatched performance in adverse industrial environments with its robust housing design and cater to diverse applications with multiple options of beam angles.



Type	HSN Code	MRP (INR)
BY515P LED100S 5700 NB PSU GR	9405	13,000/-
BY515P LED150S 5700 NB PSU GR	9405	15,000/-
BY515P LED200S 5700 NB PSU GR	9405	17,000/-
BY515P LED250S 5700 NB PSU GR	9405	22,000/-

CCT options of 5700K and 4000K at the same MRP. Beam angles available: NB 60° - 10000 lm, 15000 lm, 20000 lm & 25000 lm | WB 110° - 10000 lm & 15000 lm | ENB 30° - 25000 lm

GreenPerform Elite Highbay

Awarded with IF Design and Red Dot Design Awards in 2019, GreenPerform Elite Highbay is a power pack of superior performance, best in class efficacy and unmatched product design.



Type	HSN Code	MRP (INR)
BY718P LED100/CW PSU NB IN	9405	14,000/-
BY718P LED150/CW PSU NB IN	9405	18,000/-
BY718P LED200/CW PSU NB IN	9405	20,000/-
BY718P LED250/CW PSU NB IN	9405	22,000/-
BY718P LED300/CW PSU NB IN	9405	24,000/-

CCT options CW and NW. Beam angle options NB and WB. Also available in DALI and connected Interact Industry options on request.

DuraLED Highbay

IP66 & IK08 protected LED Highbay solution with PDC housing, toughened & shattered proof glass available in both narrow & wide beam optics.



Type	HSN Code	MRP (INR)
BY325P LED100S CW PSU GR FG NB XTFCL V1	9405	12,000/-
BY325P LED100S CW PSU GR FG WB XTFCL V1	9405	12,000/-
BY325P LED130S CW PSU GR FG NB XTFCL V1	9405	14,500/-
BY325P LED130S CW PSU GR FG WB XTFCL V1	9405	14,500/-
BY325P LED160S CW PSU GR FG NB XTFCL V1	9405	17,000/-
BY325P LED160S CW PSU GR FG WB XTFCL V1	9405	17,000/-
BY325P LED195S CW PSU GR FG NB XTFCL V1	9405	22,000/-
BY325P LED195S CW PSU GR FG WB XTFCL V1	9405	22,000/-

Durabay Prime

Durabay Prime is IP66 & IK08 protected next gen highbay solution with PDC housing, delivers uniform light distribution with both NB &WB optics.



Type	HSN Code	MRP (INR)
BY225P LED100S CW NB PSU FG GR V1	9405	12,000/-
BY225P LED100S CW WB PSU FG GR V1	9405	12,000/-

Also available in 13500 lumen

Maxolid

IP65, PDC LED highbay with circular form factor and available in both narrow & wide beam optics options of toughened glass & PC cover to choose from.



Type	HSN Code	MRP (INR)
BY415P LED145S CW HE NB FG PSU GR XTFCL S5	9405	18,000/-
BY415P LED145S CW HE WB FG PSU GR XTFCL S5	9405	18,000/-
BY415P LED145S CW NB FG PSD GR S5	9405	19,000/-
BY415P LED145S CW WB FG PSD GR S5	9405	19,000/-
BY415P LED145S CW NB PC PSU GR S5	9405	18,000/-
BY415P LED145S CW WB PC PSU GR S5	9405	18,000/-
BY415P LED145S CW NB PC PSD GR S5	9405	19,000/-
BY415P LED145S CW WB PC PSD GR S5	9405	19,000/-
BY415P LED160S CW HE NB FG PSU GR XTFCL S5	9405	22,000/-
BY415P LED160S CW HE WB FG PSU GR XTFCL S5	9405	22,000/-
BY415P LED160S CW NB FG PSD GR S5	9405	23,000/-
BY415P LED160S CW WB FG PSD GR S5	9405	23,000/-
BY415P LED275S CW PSU GR FG NB XTFCL V1	9405	25,500/-
BY415P LED275S CW PSU GR FG WB XTFCL V1	9405	25,500/-
BY415P LED240S CW PSU GR FG NB XTFCL V1	9405	24,500/-
BY415P LED240S CW PSU GR FG WB XTFCL V1	9405	24,500/-

Also available in 4000K CCT

Maxolid NI

Non integral IP65, PDC LED highbay with circular form factor and available in both narrow & wide beam optics, options of toughened glass & PC cover to choose from.



Type	HSN Code	MRP (INR)
BY416P LED240S CW SK60 FG GR NI S5	9405	20,000/-
BY416P LED240S CW SY20 FG GR NI S5	9405	20,000/-
ZVS431 2x100W PSU XTFCL	9405	5,000/-
ZVS431 2x100W PSU XTFCL(IP65)	9405	7,500/-



Mini 200

Mini 200 is an intuitive under canopy luminaire suitable for petrol station, sport complex, community center lighting. It has PDC housing, IP66 & IK08 protection & precision control optics- choice of both symmetric & asymmetric version available.



Type	HSN Code	MRP (INR)
BY286V LED90S CW SK PSU FG WH	9405	11,000/-
BY286V LED90S CW AK PSU FG WH	9405	11,000/-
BY286V LED85S CW SK PSU FG WH	9405	10,000/-
BY286V LED85S CW AK PSU FG WH	9405	10,000/-

GreenBay

Versatile highbay family designed to address recessed and suspended lighting application in industries with multiple options of optics. Mounting accessories to be ordered separately.



Type	HSN Code	MRP (INR)
BY400V LED72S CW AK PSU S2 FG WH	9405	13,500/-
BY400V LED145S CW AK PSU S2 FG WH	9405	18,500/-
BY400V LED72S CW SK PSU S2 FG WH	9405	13,500/-
BY400V LED110S CW SK PSU S2 FG WH	9405	16,500/-
BY400V LED145S CW SK PSU S2 FG WH	9405	18,500/-
BY400V LED72S CW SY60 PSU S2 FG WH	9405	13,500/-
BY400V LED110S CW SY60 PSU S2 FG WH	9405	16,500/-
BY400V LED145S CW SY60 PSU S2 FG WH	9405	18,500/-
BY400V LED72S CW SY110 PSU S2 FG WH	9405	13,500/-
BY400V LED110S CW SY110 PSU S2 FG WH	9405	16,500/-
BY400V LED145S CW SY110 PSU S2 FG WH	9405	18,500/-
BY400V LED110S CW AK PSU S2 FG WH	9405	16,500/-
AC400Z WH	9405	800/-
AC400B WH-RECESS	9405	1,600/-
AC400C WH-SURFACE	9405	1,800/-
AC400P WH-SUSPENDED	9405	3,500/-

EnduraLED Midbay

Robust & reliable IP66 & IK08 protected LED midbay with PDC housing & toughened glass suitable for ceiling (Surface/Suspended) mount & available in wide beam (Rotational Symmetric) optics.



Type	HSN Code	MRP (INR)
BY150P LED76S CW PSU HE SY120 FG GR	9405	9,500/-
BY150P LED76S CW PSU HE SY120 FG GR LILO	9405	10,000/-



LED Bulkhead & Wellglass

DuraLED WellGlass G2

New Gen2 of DuraLED WellGlass with improved lumen efficacy and lumen packs upto 4200lm with single piece pressure die cast aluminium wellglass, high quality PC diffuser and has multiple mounting options available (Wall, Ceiling, Eyebolt & Cradle).



Type	HSN Code	MRP (INR)
BY300P LED31 757 PSU PC IN S2	9405	4,500/-
BY300P LED31 757 PSU PC IN S2 LILO	9405	5,000/-
BY300P LED31 757 PSU PC IN S2 SPD	9405	5,500/-
BY300P LED37 757 PSU PC IN S2	9405	5,000/-
BY300P LED37 757 PSU PC IN S2 LILO	9405	5,500/-
BY300P LED37 757 PSU PC IN S2 SPD	9405	6,000/-
BY300P LED42 757 PSU PC IN S2	9405	5,500/-
BY300P LED42 757 PSU PC IN S2 LILO	9405	6,000/-
BY300P LED42 757 PSU PC IN S2 SPD	9405	6,500/-

CCT options of 4000K & 5700K

DuraLED WellGlass

Single piece pressure die cast aluminium wellglass with high quality PC diffuser and has multiple mounting options available (Wall, Ceiling, Eyebolt & Cradle).



Type	HSN Code	MRP (INR)
BY300P LED 27S CW PSU S1 PC	9405	4,500/-
BY300P LED 27S CW PSU S1 PC LILO	9405	5,000/-
BY300P LED 27S CW PSU S1 PC SPD	9405	5,500/-
BY300P LED 37S CW PSU S1 PC	9405	5,000/-
BY300P LED 37S CW PSU S1 PC LILO	9405	5,500/-
BY300P LED 37S CW PSU S1 PC SPD	9405	6,000/-

Also available in NW & WW

EnduraLED WellGlass

Robust & reliable IP66 & IK08 protected LED Wellglass luminaire with PDC housing & polycarbonate diffuser suitable for wall & ceiling mounting application.



Type	HSN Code	MRP (INR)
BY201P LED78S CW PSU HE PC	9405	7,200/-

LILO option available on demand.

EnduraLED Bulkhead

Pressure die cast housing LED bulkhead with IP66 protection and IK09 impact resistance suitable for surface and wall mounting applications.



Type	HSN Code	MRP (INR)
WT202W LED6S NW PSU S2 PC	9405	1,600/-
WT202W LED6S CW PSU S2 PC	9405	1,600/-

VistaGlow

Robust & reliable LED bulk head with IP65 protection & IK08 impact resistance suitable for surface and wall mounting applications.



Type	HSN Code	MRP (INR)
WT140W LED7S CW PSU S1 PC	9405	999/-
WT140W LED7S NW PSU S1 PC	9405	999/-



Industrial Battens

EnduraLED Next

Flicker free, high efficiency and robust industrial batten family suitable for surface, wall and conduit mounting. The product family offers dimmable and connected batten option.



Type	HSN Code	MRP (INR)
BN308C LED20S-6500 L60 PSU WH	9405	1,900/-
BN308C LED20S-6500 L120 PSU WH	9405	1,950/-
BN308C LED40S-6500 L120 PSU WH	9405	3,200/-
BN308C LED60S-6500 L120 PSU WH	9405	4,400/-
BN308C LED40S-6500 L120 PSD WH	9405	4,500/-
BN308C LED20S-6500 L120 PIR WH	9405	2,950/-
BN308C LED40S-6500 L120 PIR WH	9405	4,200/-
BN308C LED60S-6500 L120 PIR WH	9405	5,400/-
Mounting Accessories		
AC308C MB S/A	9405	100/-
AC308P MB S/A	9405	100/-

Also available in 4000K & interact ready platform variant

TMC 501

Mounting rail for TLED lamps.



Type	HSN Code	MRP (INR)
TMC 501 P 1xT-LED 22W P3241	9405	500/-
TMC 501 P 2xT-LED 22W P3242	9405	600/-



Waterproof LED Luminaires

SmartBright Waterproof

IP65, dust and waterproof LED luminaire with polycarbonate housing suitable for wall & ceiling mount applications.



Type	HSN Code	MRP (INR)
WT201C LED44S-6500 PSU L120	9405	4,000/-
WT201C LED24S-6500 PSU L120	9405	3,000/-

Also available in 4000K

Essential SmartBright IP65 Batten

Essential SmartBright batten provides the opportunity to the customers to upgrade to a superior quality IP65 batten assuring high performance in harsh industrial environments.



Type	HSN Code	MRP (INR)
WT150C LED 20S 6500 PSU L120	9405	2,800/-
WT150C LED 20S 4000 PSU L120	9405	2,800/-
WT150C LED 40S 6500 PSU L120	9405	3,800/-
WT150C LED 40S 4000 PSU L120	9405	3,800/-

Waterproof LED Luminaire


Surface/Suspended mounted waterproof (IP65) luminaire suitable for single and twin T8 TLED lamps.



Type	HSN Code	MRP (INR)
TCW450 P 1XTLED 19W P3397	9405	2,200/-
TCW450 P 2XTLED 19W P3397	9405	2,500/-

PureSpace CleanRoom Range

PureSpace is a comprehensive CleanRoom luminaires range with options for bottom opening, top opening, 2'x2' as well 1'x4'.



Type	HSN Code	MRP (INR)
CR652B LED60S-6500 PSU CA TO W30L120 WH	9405	18,000/-
CR652B LED36S-6500 PSU CA BO W30L120 WH	9405	15,000/-
CR652B LED36S-6500 PSU CA TO W60L60 WH	9405	13,000/-
CR652B LED60S-6500 PSU CA TO W60L60 WH	9405	16,000/-
CR652B LED80S-6500 PSU CA TO W60L60 WH	9405	18,000/-
CR652B LED36S-6500 PSU CA BO W60L60 WH	9405	12,500/-
CR652B LED60S-6500 PSU CA BO W60L60 WH	9405	15,000/-
CR652B LED80S-6500 PSU CA BO W60L60 WH	9405	17,500/-

CCT options: 6500K and 4000K. Also available in DALI option at additional INR 3000/- on MRP.



Interact Pro connected
lighting dashboard and app

interact Pro


An intuitive app and dashboard that works with Philips Interact Ready lamps and luminaires to bring the power of IoT.

Lights. Insights. Action.

It enables you to both control and receive data from the LED light points and sensors within the connected lighting system. You can program and automate light settings, while collecting data on where and how you use lighting. It's intuitive to set up and use. And it's the smart way to optimize energy savings.

How the connected lighting system comes together.

The **Interact Pro dashboard and app** work with a range of Philips luminaires and lamps and a set of wireless switches and sensors that are Interact Ready. You can customize the software's settings for specific workspaces. Whether you're connecting 20 light points or 200, Interact Pro helps everyone to work smarter.

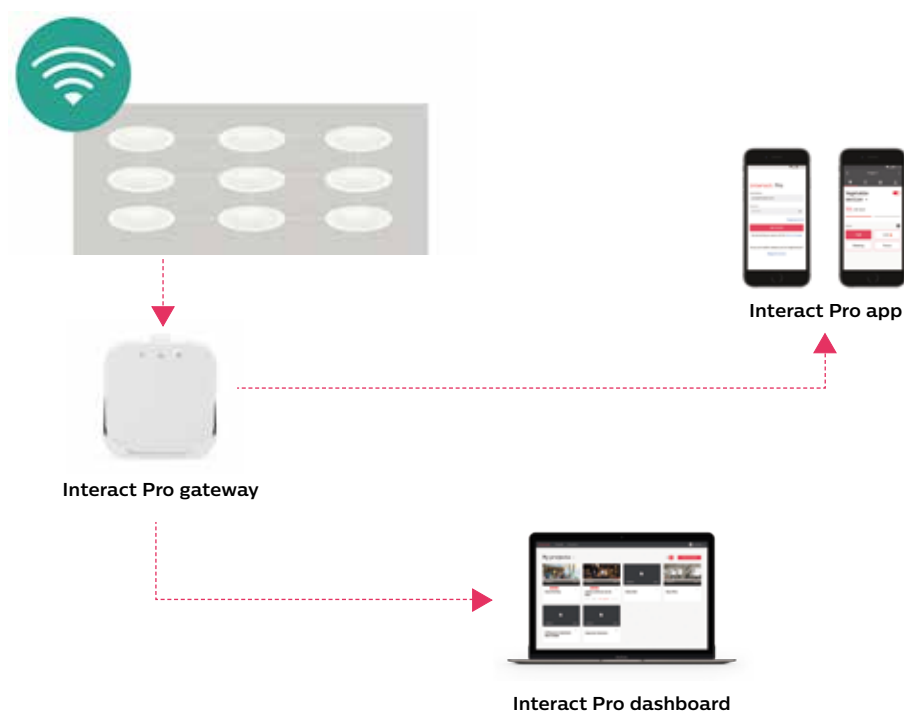



Key benefits:

- Power of personalization
- Energy usage dashboards with failure reports
- Fast installation, no cables

How is Interact unique?

Interact Pro is a truly unique offering today in the market and suits all your lighting needs- whether you are building a new small office or a retail shop, or you are planning an upgrade from your existing conventional Lighting to LED lighting system (retrofit).

Completely Wireless Setup

Organizations today are specifically constrained in a retrofit setup to explore the benefits of connected lighting, as it requires wiring, layout changes and a deep renovation leading to significant work downtime. Interact Pro is a completely wireless solution and hence does not require any new wirings or changes in your workplace.

Power of Simplicity

System complexity often scares organizations and workplace leaders to completely explore the benefits of connected lighting and this is specifically true for small spaces. With its Intuitive App and commissioning simplicity, Interact Pro provides a unique connected platform.

Philips Interact Ready connected lighting

Interact Pro software is designed to be affordable for small spaces. It works with any Philips lighting connected LED lamps and luminaires that are Interact Ready. Sensors and wall switches are interoperable and upgradeable, meaning you're prepared for any changes the future might throw at you.

You can start saving energy straight away, with direct point-for-point replacement of conventional lights.



Type	HSN Code	MRP (INR)
DN395B LED20S-6500 IA WH	9405	6,000/-
DN395B LED20S-4000 IA WH	9405	6,000/-
DN395B LED20S-3000 IA WH	9405	6,000/-
RS271B LED40S-4000 IA MB WH	9405	8,500/-
RS271B LED40S-3000 IA MB WH	9405	8,500/-
RS271B LED20S-4000 IA MB WH	9405	8,000/-
RS271B LED20S-3000 IA MB WH	9405	8,000/-
RS271B LED40S-4000 IA WB WH	9405	8,500/-
RS271B LED40S-3000 IA WB WH	9405	8,500/-
RS271B LED20S-4000 IA WB WH	9405	8,000/-
RS271B LED20S-3000 IA WB WH	9405	8,000/-
RC380B LED36S-4000 IA W60L60 G4 OD	9405	7,500/-
RC380B LED36S-6500 IA W60L60 G4 OD	9405	7,500/-
RC380B LED30S-4000 IA W60L60 G4 OD	9405	6,500/-
RC380B LED30S-6500 IA W60L60 G4 OD	9405	6,500/-
BN308C LED40S-6500 L120 IA WH	9405	5,200/-
BN308C LED40S-4000 L120 IA WH	9405	5,200/-
Wireless Occupancy Sensor EasySmart	-	10,000/-
ZigBee Green Power Switch Dim	-	12,000/-
ProSite v20	-	1,00,000/-
ProSite v50	-	1,30,000/-
ProSite v100	-	1,50,000/-
ProSite v150	-	2,00,000/-
ProSite v200	-	2,50,000/-

PHILIPS





Outdoor



Street Lights

SmartBright Street

High performance low wattage street light with single die ceramic base high power LED light source with IP66 protection, PDC housing with finless design and high impact resistance (IK08) polycarbonate cover luminaire. Pole dia: 32-40mm.



Type	HSN Code	MRP (INR)
BRP042 LED 14 CW MR S1 PSU GR	9405	2,300/-
BRP042 LED 19 CW MR S1 PSU GR	9405	2,500/-
BRP042 P LED25 CW SLE S1 PSU GR P4210	9405	3,200/-
BRP042 P LED30 CW MR S1 PSU GR SPD P4371	9405	3,680/-

CCT option: NW/WW | 10 KV SPD is provisioned inside luminaire. Add Rs 200 for MRP.

SmartBright Street

High performance low wattage street light with single die ceramic base high power LED light source, IP66 protection, PDC housing with finless design and high impact resistance (IK08) polycarbonate cover with integrated street light optics. Pole dia.: 32-40mm.



Type	HSN Code	MRP (INR)
BRP046 LED 30 CW MR S1 PSU GR	9405	4,500/-
BRP046 LED 36 CW MR S1 PSU GR	9405	5,000/-
BRP046 LED 39 CW MR S1 PSU GR	9405	5,300/-

CCT options of 3000K and 4000K. Add Rs. 300/- for SPD version.

SmartBright Street

High performance street light luminaire with single die ceramic base high power LED light source, IP66 protection, PDC housing & aesthetic finless design and toughened glass cover and street light optics for lighting of internal B2 category roads in cities. Pole dia.: 32-40mm.



Type	HSN Code	MRP (INR)
BRP 052 LED 045 CW SLMR FG S1 PSU GR	9405	6,200/-

CCT options of 3000K and 4000K.

SmartBright Street

High performance street light luminaire having single die ceramic base high power LED light source, IP66 protection, PDC housing with finless design and polycarbonate cover (IK08). The luminaire family comes with dedicated street optics making it suitable for B2 category roads. Pole dia: 48-60mm.



Type	HSN Code	MRP (INR)
BRP056 LED47 CW SLF PSU S1	9405	5,500/-
BRP056 LED53 CW SLF PSU S1	9405	5,650/-
BRP056 LED59 CW SLF PSU S1	9405	5,800/-

CCT options of 3000K and 4000K. Add Rs. 400/- for SPD version.

GreenLine V3

High performance street light luminaire having Single Die ceramic base high power LED light source, IP66 protection, PDC housing with Finless design and polycarbonate cover (IK08) & Glass option. The luminaire family comes with dedicated street Optics making it suitable for B2 Category roads. Pole Dia: 32-40mm.



Type	HSN Code	MRP (INR)
BRP409 LED82 CW M2 FG PSU OD40 P4498	9405	8,000/-
BRP409 LED82 CW M2 PC PSU OD40 P4500	9405	8,000/-

CCT option: NW/WW. | 10 KV SPD is provisioned inside luminaire. Add Rs 400 for MRP.

SmartBright Street

High performance street light luminaire having single die ceramic base high power LED light source, IP66 protection, PDC housing with finless design and polycarbonate cover (IK08). The luminaire family comes with dedicated street optics making it suitable for wide variety of road applications (A2) category of roads, highways (single/multi Lane). Pole dia.: 48-60mm.



Type	HSN Code	MRP (INR)
BRP062 LED 65 CW SLA S1 PSU	9405	6,000/-
BRP062 LED 68 CW SLC S1 PSU	9405	6,000/-
BRP062 LED 80 CW SLC A1 S1 PSU*	9405	6,900/-
BRP062 LED 82 CW SLA S1 PSU	9405	8,000/-
BRP062 LED 84 CW SLC S1 PSU	9405	8,000/-
BRP062LED 92 CW SLC A1 S1 PSU*	9405	9,200/-

CCT option: NW/WW. | 10 KV SPD is provisioned inside luminaire. Add Rs 400 for MRP.
 *130 efficacy.

GreenLine V2

GreenLine V2 is an IP66 road lighting luminaire with single die ceramic base high power LED light source, PDC housing, toughened glass cover and unique peanut lens to ensure uniform light distribution, higher spacing between poles and maintenance free system. Suitable for A1 and A2 category roads. Pole dia.: 48-60mm.



Type	HSN Code	MRP (INR)
BRP409 LED115 CW SLC FG PSU GR V2	9405	9,400/-
BRP409 LED115 CW SLA FG PSU GR V2	9405	9,400/-
BRP409 LED115 CW SLC FG A1 PSU GR*	9405	10,800/-
BRP409 LED130 CW SLC FG PSU GR V2	9405	10,200/-
BRP409 LED130 CW SLA FG PSU GR V2	9405	10,200/-
BRP409 LED137 CW SLC FG A1 PSU GR*	9405	11,800/-

CCT option: NW/WW. | 10 KV SPD is provisioned inside luminaire. Add Rs 300 for MRP. |
 Connected option: 1-10V. | *>130 efficacy available in SLA & SLNR optics also.

GreenLine V3

GreenLine V3 is an IP66 road lighting luminaire with Single Die ceramic base high power LED light source, PDC housing, Toughened Glass & PC cover and unique peanut lens to ensure uniform light distribution, higher spacing between poles and maintenance free system. Suitable for A1 and A2 category roads. Pole Dia: 48-60mm.



Type	HSN Code	MRP (INR)
BRP409 LED110 CW M2 FG PSU GR V3	9405	9,400/-
BRP409 LED130 CW M2 FG PSU GR V3	9405	10,200/-

CCT option: NW/WW. | 110 KV SPD is provisioned inside luminaire. Add Rs 300 for MRP. | Connected option: 1-10V.

GreenLine V3

GreenLine V3 is an IP66 road lighting luminaire with Single Die ceramic base high power LED light source, PDC housing, Option of toughened glass & PC cover and unique lens to ensure uniform light distribution, higher spacing between poles and maintenance free system. Suitable for A1 and A2 category roads. Pole Dia: 48-60mm.



Type	HSN Code	MRP (INR)
BRP410 LED140 CW M2 FG PSU	9405	14,000/-
BRP410 LED140 CW M2 PC PSU	9405	14,000/-

CCT option: NW/WW. | 110 KV SPD is provisioned inside luminaire. Add Rs 800 for MRP. | Connected option: Dimmable 1-10V.

Skyline

Skyline family is an IP66 road lighting luminaire with single die ceramic base high power LED light source, PDC housing with top openable access to drivers for ease of maintenance. Integrated optics ensure uniform distribution and higher efficacy thus offering higher spacing between poles and maintenance free system. Ideal for road width up to 8-12 meters. Pole dia: 48-60mm.



Type	HSN Code	MRP (INR)
BRP 340 LED 150 CW HO SLC S2 PSU GR	9405	14,000/-
BRP340 LED164 CW SLC A1 PSU GR*	9405	16,100/-
BRP 340 LED 175 CW HO SLC S2 PSU GR	9405	16,000/-
BRP340 LED191 CW SLC A1 PSU GR*	9405	18,400/-
BRP 340 LED 200 CW HO SLC S2 PSU GR	9405	18,000/-
BRP340 LED191 CW SLC A1 PSU GR*	9405	20,700/-

CCT option: NW/WW. | 10 KV SPD is provisioned inside luminaire. Add Rs 800 for MRP. | Connected option: Dimmable 1-10V. | *135 efficacy.

Skyline Xtra

Skyline Xtra family is an IP66 road lighting luminaire with high power LED light source, PDC housing with top openable access to drivers for ease of maintenance. Integrated optics ensure uniform distribution and higher efficacy thus offering higher spacing between poles and maintenance free system ideal for road width up to 8-15 meters. (170W -235W). Pole dia: 48-60mm.



Type	HSN Code	MRP (INR)
BRP360 LED 213 CW HO SLC S1 PSU GR	9405	24,000/-
BRP360 LED232 CW SLC A1 PSU GR*	9405	27,600/-
BRP360 LED 240 CW HO SLC S1 PSU GR	9405	27,000/-
BRP360 LED260 CW SLC A1 PSU GR*	9405	31,000/-
BRP360 LED 265 CW HO SLC S1 PSU GR	9405	29,900/-
BRP360 LED287 CW SLC A1 PSU GR*	9405	34,400/-
BRP360 LED 295 CW HO SLC S1 PSU GR	9405	33,000/-
BRP360 LED320 CW SLC A1 PSU GR*	9405	-

CCT option: NW/WW. | 2. 10 KV SPD is provisioned inside luminaire. Add Rs 800 for MRP. | Connected option: Dimmable 1-10V. | * 135 efficacy.


SkyLine e Way

SkyLine Xtra family is an IP66 road lighting luminaire with Single Die ceramic base high power LED light source, PDC housing with top openable access to drivers for ease of maintenance. Comes with integrated optics (4 Optics) to ensure uniform distribution and higher efficacy thus offering higher spacing between poles and maintenance free system ideal for road width up to 10-18 meters. (300W-330W). Pole Dia: 48-60mm.



Type	HSN Code	MRP (INR)
BRP370 LED414 CW SLC S1 PSU GR*	9405	62,400/-
BRP370 LED414 CW SLD S1 PSU GR*	9405	62,400/-
BRP370 LED414 CW SLG S1 PSU GR*	9405	62,400/-
BRP370 LED414 CW SLH S1 PSU GR*	9405	70,200/-
BRP370 LED455 CW SLC S1 PSU GR*	9405	70,200/-
BRP370 LED455 CW SLD S1 PSU GR*	9405	70,200/-
BRP370 LED455 CW SLG S1 PSU GR*	9405	70,200/-
BRP370 LED455 CW SLH S1 PSU GR*	9405	70,200/-

CCT option: NW/WW. | 10 KV SPD is provisioned inside luminaire. Add Rs. 800 for MRP. Connected option: Dimmable 1-10V. | * 140 efficacy.

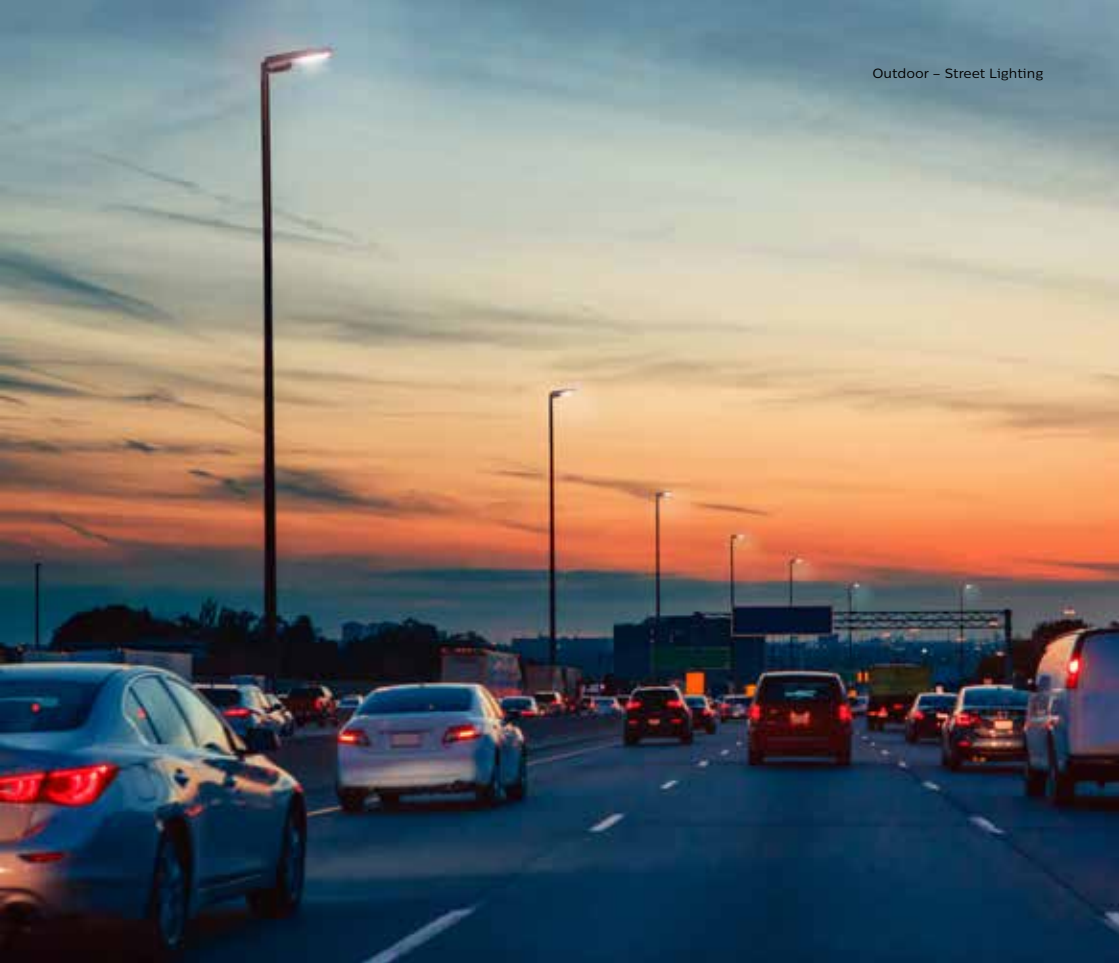

SmartBright Essential

SmartBright Essential is a street lighting luminaire with PDC housing and street light optics to ensure uniform distribution.



Type	HSN Code	MRP (INR)
BRP029 LED25 CW MR PSU GR DX	9405	3,000/-
BRP030 LED35 CW MR PSU GR DX	9405	3,500/-
BRP031 LED45 CW MR PSU GR DX	9405	5,000/-
BRP032 LED60 CW SLR GR PSU	9405	6,000/-
BRP032 LED60 WW SLR GR PSU	9405	6,000/-
BRP032 LED70 CW MR PSU GR DX	9405	7,000/-
BRP033 LED90 CW SLR GR PSU	9405	9,000/-

PHILIPS

interact City

Full end-to-end lighting management application. Easy to install, use and expand.

Philips offer wide variety of street light luminaires with smart devices, enabled for integration on to Interact Platform. Product support wired and wireless architectures offered as part connected portfolio for cities.



Interact Ready street light options



BRP410
GreenLineV2



BRP340
Skyline



BRP360
Skyline Xtra



BRP322
GreenlineXtra



BRP371
Unistreet



BRP471
RoadCharm



Flood Lights

Uniflood

Uniflood is a flood lighting luminaire with single die ceramic base high power LED, PDC housing and unique flood optics (NB) to ensure uniform distribution.



Type	HSN Code	MRP (INR)
BVP120 LED 35 CW FG S1 PSU GR	9405	7,500/-
BVP120 LED47 CW NB FG A1 PSU GR*	9405	9,000/-
BVP120 LED 70 CW FG S1 PSU GR	9405	13,500/-
BVP120 LED94 CW NB FG A1 PSU GR*	9405	15,000/-

CCT option: NW/WW. | 110 KV SPD is provisioned inside luminaire. Add Rs 200 for MRP. | Dimmable Option: 1-10V. | *135 efficacy.

Tango Mini

Tango Mini is a flood lighting luminaire with single die ceramic base high power LED, PDC housing and unique flood optics (NB) to ensure uniform distribution. Maintenance free system, ideal for area lighting, billboard lighting and mini mast lighting.



Type	HSN Code	MRP (INR)
BVP192 LED82 CW HO NB FG GR PSU	9405	10,000/-
BVP192 LED100 CW NB FG A1 GR PSU*	9405	11,500/-
BVP192 LED110 CW HO NB FG GR PSU	9405	12,000/-
BVP192 LED132 CW NB FG A1 GR PSU*	9405	13,800/-
BVP192 LED145 CW NB FG GR PSU	9405	20,000/-
BVP192 LED158 CW NB FG A1 GR PSU*	9405	23,000/-
BVP192 LED160 CW NB FG GR PSU	9405	22,000/-
BVP192 LED172 CW NB FG A1 GR PSU*	9405	25,300/-

CCT option: NW/WW. | 10 KV SPD is provisioned inside luminaire. Add Rs 400 for MRP. | Dimmable option: 1-10V. | *>130 efficacy

Uniflood 2

Uniflood is a flood lighting luminaire with single die ceramic base high power LED, PDC housing and unique flood optics (AMB,SY,NB) to ensure uniform distribution. Maintenance free systems Ideal for Industrial, area, recreational sports - outdoor & indoor stadiums.



Type	HSN Code	MRP (INR)
BVP122 LED147 CW AK55 FG PSU A1*	9405	25,000/-
BVP122 LED160 CW FLNB FG PSU A1*	9405	25,000/-
BVP122 LED162 CW SY24 FG PSU A1*	9405	25,000/-
BVP122 LED168 CW AK55 FG PSU A1*	9405	26,000/-
BVP122 LED184 CW FLNB FG PSU A1*	9405	26,000/-
BVP122 LED185 CW SY24 FG PSU A1*	9405	26,000/-
BVP122 LED 170 CW HO NB FG FC S5 P4319	9405	28,000/-
BVP122 LED200 CW FLNB FG PSU A1*	9405	28,000/-

CCT option: NW/WW. | 110 KV SPD is provisioned inside luminaire. Add Rs 200 for MRP. | Dimmable option: 1-10V. | *>130 efficacy.

Tango LED

"Best in class lens design & optical integration" is a flood lighting luminaire with single die ceramic base high power LED, PDC housing & integrated flood optics (SWB, NB, AMB, SMB, SWB) to ensure uniform distribution maintenance free system, ideal for sports lighting, area lighting and high mast lighting.



Type	HSN Code	MRP (INR)
BVP483 LED185 CW SWB PSU GR	9405	19,000/-
BVP483 LED185 CW NB PSU GR	9405	19,000/-
BVP483 LED185 CW SMB PSU GR	9405	19,000/-
BVP483 LED185 CW AWB PSU GR	9405	20,000/-
BVP483 LED185 CW AMB PSU GR	9405	20,000/-
BVP483 LED208 CW NB A1 PSU GR SPD*	9405	23,000/-
BVP483 LED210 CW SWB PSU GR	9405	21,000/-
BVP483 LED210 CW NB PSU GR	9405	21,000/-
BVP483 LED210 CW SMB PSU GR	9405	21,000/-
BVP483 LED210 CW AWB PSU GR	9405	22,000/-
BVP483 LED210 CW AMB PSU GR	9405	22,000/-
BVP483 LED234 CW NB A1 PSU GR SPD*	9405	25,300/-
BVP483 LED235 CW SWB PSU GR	9405	25,000/-
BVP483 LED235 CW NB PSU GR	9405	25,000/-
BVP483 LED235 CW AWB PSU GR	9405	25,000/-
BVP483 LED235 CW AMB PSU GR	9405	25,000/-
BVP483 LED235 CW SMB PSU GR	9405	25,000/-
BVP483 LED259 CW NB A1 PSU GR SPD*	9405	28,750/-

CCT option: NW/WW. | 10 KV SPD is provisioned inside luminaire is available in all options. | Dimmable option: 1-10V. | *135 efficacy and available in SWB, SMB, AWB, AMB optics also.

TempoLED

TempoLED is a flood lighting luminaire with single die ceramic base high power LED, PDC housing and unique flood optics(AMB,SY,NB) to ensure uniform distribution. maintenance free system ideal for area lighting, high mast and billboard.



Type	HSN Code	MRP (INR)
BVP410 P LED300 CW NB FG PSU SPD P4278	9405	54,000/-
BVP410 LED340 CW NB A1 PSU GR SPD*	9405	62,100/-

CCT option: NW/WW. | 10 KV SPD is provisioned inside luminaire is available in all options. | Dimmable option: 1-10V. | * 135 efficacy.



Tango XL LED

Tango XL LED - with "Best in class lens design & optical integration" is a flood lighting luminaire with single die ceramic base high power LED, PDC Housing with integrated flood optics (AWB, FLNB, NB) to ensure uniform distribution and maintenance free system, ideal for recreational sports lighting, area lighting and high mast lighting.



Type	HSN Code	MRP (INR)
BVP485 LED370 CW FLNB PSU SPD GR	9405	57,200/-
BVP485 LED370 CW AWB PSU SPD GR	9405	57,200/-
BVP485 LED380 CW NB PSU SPD GR	9405	57,200/-
BVP485 LED400 CW NB A1 PSU GR SPD*	9405	65,780/-
BVP485 LED427 CW FLNB PSU SPD GR	9405	62,400/-
BVP485 LED427 CW AWB PSU SPD GR	9405	62,400/-
BVP485 LED445 CW NB PSU SPD GR	9405	62,400/-
BVP485 LED470 CW NB A1 PSU GR SPD*	9405	71,760/-
BVP485 LED485 CW FLNB PSU SPD GR	9405	70,200/-
BVP485 LED485 CW AWB PSU SPD GR	9405	70,200/-
BVP485 LED510 CW NB PSU SPD GR	9405	70,200/-
BVP485 LED535 CW NB A1 PSU GR SPD*	9405	80,730/-
BVP485 LED540 CW FLNB PSU SPD GR	9405	78,000/-
BVP485 LED540 CW AWB PSU SPD GR	9405	78,000/-
BVP485 LED575 CW NB PSU SPD GR	9405	78,000/-
BVP485 LED600 CW NB A1 PSU GR SPD*	9405	89,700/-
BVP485 LED560 CW FLNB PSU SPD GR	9405	83,200/-
BVP485 LED560 CW AWB PSU SPD GR	9405	83,200/-
BVP485 LED600 CW NB PSU SPD GR	9405	83,200/-
BVP485 LED630 CW NB A1 PSU GR SPD*	9405	95,680/-

CCT option: NW/WW. | 20 KV SPD is provisioned inside luminaire is available in all options. | Dimmable option: 1-10V. | *135 efficacy - Higher efficacy available in all options.



SportStar Gen2

Philips SportsStar Gen2 is a revolutionary innovative product for sports lighting, being one to one replacement to ArenaVision MVF403 2000W applications. Equipped with professional sports beam angle & complying with HDTV broadcasting requirement.



Type	HSN Code	MRP (INR)
BVP680 LED1620/957 1620W 230-400V S2	9405	On request
BVP680 LED1620/957 1620W 230-400V S5	9405	On request
BVP680 LED1620/957 1620W 230-400V S7	9405	On request

ArenaVision LED Gen 3.5

The Philips ArenaVision LED floodlighting system is an innovative LED pitch-lighting solution supporting the latest TV broadcasting standards. Designed exclusively for sports and multi-purpose venues, ArenaVision LED offers outstanding light quality, effective thermal management, and long lifetime.



Type	HSN Code	MRP (INR)
BVP428 1560/957 PSU 220-400V BV S7 T40	9405	On request
BVP428 1560/957 PSU 220-400V HGB S7 T40	9405	On request

Tempo Mini

Tempo Mini is a flood lighting luminaire with PDC housing and unique flood optics (NB) to ensure uniform distribution.



Type	HSN Code	MRP (INR)
BVP180 LED50 CW PC WB 50W 120-270 PSU	9405	5,000/-
BVP181 LED62 CW PC WB 70W 120-270 PSU	9405	7,000/-
BVP182 LED100 CW FG WB 100W 120-270 PSU	9405	9,500/-

Tempo Max

Tempo Max is a flood lighting luminaire with PDC housing and unique flood optics (SYWB) to ensure uniform distribution.



Type	HSN Code	MRP (INR)
BVP183 LED156 CW FG SYWB 150W PSU	9405	14,000/-
BVP184 LED215 CW FG SYWB 200W PSU	9405	18,000/-

SmartBright Essential

SmartBright essential flood light is aesthetically designed flood lighting luminaire for superior performance.



Type	HSN Code	MRP (INR)
BVP131 LED8/CW 10W 100-240V WB IN	9405	900/-
BVP101 LED20 CW FG GR PSU	9405	1,200/-
BVP102 LED30 CW FG GR PSU	9405	2,650/-
BVP103 LED50 CW FG GR PSU	9405	5,000/-
BVP141 LED70 CW FG GR PSU	9405	7,000/-
BVP142 LED100 CW FG GR PSU	9405	9,500/-
BVP183 LED140 CW FG WB 150W PSU	9405	14,000/-
BVP184 LED196 CW FG WB 200W PSU	9405	18,000/-

PHILIPS

interact Sports

The Interact Sports dashboard and application suite collect and deliver unique data insights that help you manage both your venue and your audience as efficiently as possible.

Philips offer wide variety of flood light luminaires with smart devices, enabled for integration on to Interact Sports Platform. Product support wired and wireless architectures offered as part connected portfolio for sports facilities.





Interact Ready flood light options



BVP483
Tango



BVP483 DD
Tango DD



BVP410
Temp LED



BVP485
Tango XL



BVP621
Sportstar Gen1



BVP680
SportStar Gen II



AV 3.5
Arena Vision Gen 3.5



Landscape Lighting

Town Glow Post Top

Town Glow is a contemporary designer IP66/IK10 Post Top lantern with symmetric light distribution.



Type	HSN Code	MRP (INR)
BGP300 LED28 757 PSU PC IN S1	9405	18,000/-
BGP300 LED40 757 PSU PC IN S1	9405	19,000/-
BGP300 LED50 757 PSU PC IN S1	9405	20,000/-

CCT options: 3000K and 4000K. Add Rs. 800/- for SPD version.

LED Post Top

Reliable and aesthetic designed IP65 Post Top lantern with symmetric light distribution and limited upward light component.



Type	HSN Code	MRP (INR)
BGP161 LED2500/NW PSU 220-240V 7043 IN	9405	20,000/-
BGP161 LED2300/WW PSU 220-240V 7043 IN	9405	20,000/-

CityCube Post Top

CityCube is a contemporary and sleek design IP66/IK08 Post top lantern with options of flat and drop diffuser for street light and area light distribution.



Type	HSN Code	MRP (INR)
BGP400 LED35 L CW PC S2	9405	37,500/-
BGP400 LED67 L CW PC S2 XT	9405	43,000/-
BGP400 LED46 L CW SLC FG S2	9405	37,500/-
BGP400 LED88 L CW SLC FG S2 XT	9405	43,000/-
BGP400 LED30 Y CW PC S2	9405	43,000/-
BGP400 LED58 Y CW PC S2 XT	9405	48,000/-

CCT options: 3000K and 4000K.

CityCube Bollard U

CityCube Bollard is a robustly designed IP65/IK10 bollard and is easy to install with base plate.

Type	HSN Code	MRP (INR)
BCP400 LED04 U CW PSU GR S1	9405	10,000/-

CCT options 3000K and 4000K.



CityCube Bollard P

CityCube Bollard is a robustly designed IP65/IK10 bollard and is easy to install with base plate.

Type	HSN Code	MRP (INR)
BCP400 LED05 P CW PSU GR S1	9405	11,500/-

CCT options: 3000K and 4000K.



CityCube Bollard T

CityCube Bollard is a robustly designed IP65/IK10 bollard and is easy to install with base plate.

Type	HSN Code	MRP (INR)
BCP400 LED09 T CW PSU GR S1	9405	17,000/-

CCT options: 3000K and 4000K.





CityCube Bollard D

CityCube Bollard is a robustly designed IP65/IK10 Bollard and is easy to install with base plate.



Type	HSN Code	MRP (INR)
BCP400 LED09 D CW PSU GR S1	9405	11,500/-

CityCube Wall Mount Horizontal/Vertical


CityCube Wall Mount is a contemporary and sleek design IP65/IK10 Wall Mount with symmetric light distribution.



Type	HSN Code	MRP (INR)
BWS400 LED05 H CW PSU GR S1	9405	6,000/-
BWS400 LED05 V CW PSU GR S1	9405	6,000/-

LED Bollard

Robustly designed IP65/IK10 Bollard is easy to install with base plate.



Type	HSN Code	MRP (INR)
BCP150 LED150/WW PSU 220-240V 7043	9405	11,500/-
BCP151 LED150/WW PSU 220-240V 7043	9405	12,000/-
BCP150 LED150/NW PSU 220-240V 7043	9405	11,500/-
BCP151 LED150/NW PSU 220-240V 7043	9405	12,000/-

LED Step Light

Robust design LED Step Light is IP67/IK10, easy to install, maintain and comes with suitable mounting box.



Type	HSN Code	MRP (INR)
BWG150 LED50/WW PSU 220-240V IP67 7043	9405	7,000/-
BWG150 LED50/NW PSU 220-240V IP67 7043	9405	7,000/-

LED Spike Light

Robust design (IP65/IK06), die cast aluminium housing with tempered glass for precise light distribution.



Type	HSN Code	MRP (INR)
BGP150 LED580/NW 8W 45D GM	9405	4,700/-
BGP150 LED580/NW 8W 20D GM	9405	4,700/-
BGP150 LED520/WW 8W 45D GM	9405	4,700/-
BGP150 LED520/WW 8W 20D GM	9405	3,500/-
BGP150 LED480/NW 6W 45D GM	9405	3,500/-
BGP150 LED480/NW 6W 20D GM	9405	3,500/-
BGP150 LED400/WW 6W 45D GM	9405	3,500/-
BGP150 LED400/WW 6W 20D GM	9405	3,500/-
BGP150 LED300/NW 3W 45D GM	9405	3,000/-
BGP150 LED300/NW 3W 20D GM	9405	3,000/-
BGP150 LED250/WW 3W 45D GM	9405	3,000/-
BGP150 LED250/WW 3W 20D GM	9405	3,000/-
BGP150 LED G 8W 35D GM	9405	5,500/-



UNIIn-Ground Range

UNIIn Ground LED ground burial range is compact, robust design IP67/IK10 with aluminium diecast housing and stainless trim, IP67 waterproof connectors ensure easy installation & maintenance free.

UNIIn-Ground: LED Marker

Compact design & robust construction.



Type	HSN Code	MRP (INR)
BBP210 LED50/WW 1W 12V 30D	9405	1,200/-
BBP211 LED90/WW 2W 12V 30D	9405	1,650/-

Driver & accessories price extra for 12 V. refer MI Sheet.

UNIIn-Ground: LED Ground Guide

Multiple lighting emission windows to make space out.



Type	HSN Code	MRP (INR)
BBP212 LED45/WW 3W 100-240V	9405	2,250/-
BBP213 LED110/WW 6W 100-240V	9405	3,200/-

UNIIn-Ground: Ground Burial

Compact and robust design with diecast aluminium housing and stainless trim, IP68 waterproof connectors.




Type	HSN Code	MRP (INR)
BBP340 LED220/WW 3W 20D 100-240V	9405	5,000/-
BBP341 LED540/WW 6W 20D 100-240V	9405	7,200/-
BBP342 LED1200/WW 12W 20D 100-240V	9405	9,000/-
BBP343 LED1800/WW 18W 20D 100-240V	9405	13,500/-
BBP344 LED3600/WW 36W 20D 100-240V	9405	14,550/-
BBP343 LED RGB 18W 20D 24V	9405	15,000/-
BBP343 LED R 18W 20D 100-240V	9405	11,500/-
BBP343 LED G 18W 20D 100-240V	9405	11,500/-
BBP343 LED B 18W 20D 100-240V	9405	11,500/-

Driver and accessories price extra for 24 V. refer MI sheet.

UNIIn-Ground: Linelite

UNIIn-Ground linear makes space distinctive with more safety and convenience of installation.



Type	HSN Code	MRP (INR)
BBP403 LED50/WW 2W 24V L300	9405	7,000/-
BBP403 LED RGB 9W 24V L300 GM	9405	9,500/-
BBP412 LED200/WW 7W 24V L1200	9405	13,500/-
BBP412 LED RGB 36W 24V L1200 GM	9405	17,500/-

Driver & accessories price extra for 24 V. refer MI Sheet.

UNILinear Flex IP68

UNILinear Flex is IP68 cove lighting with reliable performance and excellently waterproof, anti-dust LED strips with professional design for vivid colors.



Type	HSN Code	MRP (INR)
BGC301 RGB L5000	9405	27,000/-
BGC301 1200LM 5000K L5000	9405	26,000/-
BGC301 1200LM 4000K L5000	9405	26,000/-
BGC301 1100LM 3000K L5000	9405	24,000/-
BGC301 1100LM 2500K L5000	9405	24,000/-
BGC301 800LM 5000K L5000	9405	22,000/-
BGC301 800LM 4000K L5000	9405	22,000/-
BGC301 800LM 3000K L5000	9405	22,000/-
BGC301 400LM 5000K L5000	9405	18,500/-
BGC301 400LM 4000K L5000	9405	18,500/-
BGC301 400LM 3000K L5000	9405	18,500/-
BGC301 400LM 2500K L5000	9405	18500/-
ZGC301 MOUNTING KIT MONO	9405	1,550/-
ZGC301 MOUNTING KIT RGB	9405	1,885/-
BGC301 400LM 3000K L5000	9405	18,500/-
ZGC 301 IP connector	9405	790/-

- a. 24V DC Driver to be procured separately for all product mentioned above. Wattage of the driver as per site conditions.
- b. For RGB, DMX Controller and Decoder to be ordered separately, refer MI sheet.

UNI Urban

UNI Urban is decorative street light & post top range with classic design & high performance with aluminium diecast housing having IP65/IK08 protection.



Type	HSN Code	MRP (INR)
BGP461 LED40 WW 110-277V TS	9405	On request
BGP461 LED40 WW 110-277V TA	9405	On request
BGP461 LED78 WW 110-277V TS	9405	On request
BGP461 LED78 WW 110-277V TA	9405	On request
BGP461 LED120 WW 110-277V TS	9405	On request
BGP461 LED120 WW 110-277V TA	9405	On request

CCT option: 4000K

UNI Urban



Type	HSN Code	MRP (INR)
BDP461 LED33 WW 110-277V TS	9405	On request
BDP461 LED65 WW 110-277V TS	9405	On request
BDP461 LED100 WW 110-277V TS	9405	On request

UNI Urban



Type	HSN Code	MRP (INR)
BSP461 LED40 WW 110-277V TS	9405	On request
BSP461 LED40 WW 110-277V TA	9405	On request
BSP461 LED78 WW 110-277V TS	9405	On request
BSP461 LED78 WW 110-277V TA	9405	On request
BSP461 LED120 WW 110-277V TS	9405	On request
BSP461 LED120 WW 110-277V TA	9405	On request

CCT option: 4000K

UNI Urban



Type	HSN Code	MRP (INR)
BSS461 LED40 WW 110-277V CLASSIC	9405	On request
BSS461 LED78 WW 110-277V CLASSIC	9405	On request
BSS461 LED120 WW 110-277V CLASSIC	9405	On request

UNI Urban

Type	HSN Code	MRP (INR)
ZSP461 Screw-thread 370mm	9405	On request
ZSP461 Screw-thread 240mm	9405	On request
ZSP461 Screw-thread 70mm	9405	On request
Mandatory Accessory for BSS/BSP	9405	On request

ZCP461 Chess Cover



Type	HSN Code	MRP (INR)
ZCP461 Chess cover	9405	On request
Mandatory Accessory for BSS/BSP	9405	On request

ZCP461 Dome Cover



Type	HSN Code	MRP (INR)
ZCP461 Dome cover	9405	On request
Mandatory Accessory for BSS	9405	On request

Jargeau - Post Top

Jargeau LED combines the heritage look of four-sided street luminaire with the technical performance of high-performance optics, aluminium die cast housing having IP65/IK08 protection.



Type	HSN Code	MRP (INR)
Jargeau -Post Top	9405	On request





Tunnel Lights

FlowBase

FlowBase is high performance IP66 tunnel light with high power LED light source, PDC housing with high impact resistance (IK08). It comes with four sizes of configuration with mounting angle of 60 to -60 degrees. FlowBase optics ensure uniform distribution and savings up to 50%* w.r.t conventional system and maintenance free system.



Type	HSN Code	MRP (INR)
BWP352 LED77/NW 60W 220-240V DM2 MP1	9405	On request
BWP352 LED151/NW 120W 220-240V DM2 MP1	9405	On request
BWP352 LED229/NW 175W 220-240V DM2 MP1	9405	On request
BWP352 LED303/NW 235W 220-240V DM2 MP1	9405	On request

Viaduct

LED Viaduct is high performance IP66 Viaduct light with high power LED light source, PDC housing with high impact resistance (IK10). Viaduct optics ensure uniform distribution.



Type	HSN Code	MRP (INR)
BWP120 P LED20 CW PC S3 PSU GR P4247	9405	On request
BWP120 LED 36 CW FLNB S3	9405	On request
BWP120 P LED56 CW FLNB S3 PSU GR	9405	On request
BWP120 P LED78 CW FLNB S3 PSU GR	9405	On request

10 KV SPD provisioned inside housing available on request

PHILIPS





Architectural Lighting



Graze*

This high-performance linear exterior wall grazing family of luminaires offers high-quality light in a wide range of luminaire lengths, beam angles, output levels, and power consumption levels.




Type	MRP (INR)
ColorGraze Intellihue Powercore, 1ft, 9 Degree	On request
ColorGraze Intellihue Powercore, 4ft, 9 Degree	On request

*Also available in RGB/RGBW/RGBA/White version

Graze Compact

This high-performance and low-profile housing, exterior-rated linear wall grazing family of luminaires offers high-quality light in a wide range of luminaire lengths, beam angles, output levels, and power consumption levels. Luminaire is designed to highlight architectural features like molding details, archways, wall facade and windows.



Type	MRP (INR)
ColorGraze Compact Intellihue Powercore, 1ft	On request
ColorGraze Compact Intellihue Powercore, 4ft	On request

Burst*

This family of high-output, exterior-rated LED lighting luminaires is designed for accent and site lighting. Most versions feature multiple housing colors and standard architectural and landscape formats.



Type	MRP (INR)
ColorBurst Intellihue Powercore, Black Housing, Architectural Mount	On request
ColorBurst Intellihue Powercore, White Housing, Architectural Mount	On request

* Also available in RGB/RGBW/RGBA/White version

Blast*

This high-performance line of exterior luminaires offers an extremely wide range of light output, beam angles, and accessories.



Type	MRP (INR)
Intellihue Blast Gen4 Powercore, Clear Lens, White Housing, Ul/Ce	On request
Intellihue Blast Gen4 Powercore, Clear Lens, Black Housing, Ul/Ce	On request

* Also available in RGB/RGBW/RGBA/White version

ReachElite HO/HP*

ReachElite delivers exceptional light to bridges, façades, monuments, and skyscrapers—illuminating the tallest structures and highlighting details up to 564 m (1,852 ft) away with the 300 W luminaire. This family of long-throw exterior LED luminaires make it happen with high punch and rock-solid reliability.



Type	MRP (INR)
Reachelite High Output Intellihue Powercore, 100W, 100-277V	On request
Reachelite High Output Intellihue Powercore, 200W, 100-277V	On request
Reachelite High Output Intellihue Powercore, 300W, 100-277V	On request
Reachelite High Punch Intellihue Powercore, 100W, 100-277V	On request
Reachelite High Punch Intellihue Powercore, 200W, 100-277V	On request
Reachelite High Punch Intellihue Powercore, 300W, 100-277V	On request

* Also available in RGB/RGBW/RGBA/White version

ArchiPoint

ArchiPoint iColor Powercore is a daylight-visible, exterior-rated LED point of light ideally suited for a range of direct-view and beacon applications.



Type	MRP (INR)
ArchiPoint iColor Powercore, Translucent Dome Lens, 100-240V, UL/CE	On request
ArchiPoint iColor Powercore, Clear Flat Lens, 100-240V, UL/CE	On request

Flex

Cover almost any structure with flexible strands of bright LED nodes. Flex means maximum flexibility. Strands of efficient, addressable Flex nodes can be arranged along a nearly limitless array of surfaces and unconventional structures. Our proven Flex family of direct-view LED luminaires can do it all—from displaying messages on curved building façades to bringing stunning LED light shows to stadium roofs.



Type	MRP (INR)
Flex Compact Gen3, RGB, 50 Node, 4in OC, White Node/Cable, Clear Flat Lens, 3ft Whip	on request
Flex Compact Gen3, RGB, 50 Node, 4in OC, White Node/Cable, Clear Flat Lens, 3ft Whip	on request
Flex Compact Gen3, RGB, 50 Node, 4in OC, White Node/Cable, Translucent Dome Lens, 3ft Whip	on request
Flex Compact Gen3, RGB, 50 Node, 12in OC, White Node/Cable, Translucent Dome Lens, 3ft Whip	on request

Accent Compact

This family of direct view linear LED luminaires is ideally suited for displaying large-scale video, graphics, and intricately designed effects.



Type	MRP (INR)
iColor Accent Compact, RGBW, Ethernet, 1.2M (4ft), Translucent Lens	On request
iColor Accent Compact, RGBW, Ethernet, 1.2M (4ft), Clear Flat Lens	On request

PureStyle Compact**

Innovative PureStyle Compact Powercore luminaires bring lighting professionals high output in a compact, easily concealed luminaire. PureStyle Compact delivers exceptionally high-quality light for a wide range of interior applications from cove to wall-washing to backlighting and beyond. PureStyle Compact is designed for tight niches where color mixing directly out of the luminaire is important.



Type	MRP (INR)
PureStyle Compact, Intellihue, HO, 1ft	On request
PureStyle Compact, Intellihue, HO, 4ft	On request
PureStyle Compact, Intellihue, LO, 1ft	On request
PureStyle Compact, Intellihue, LO, 4ft	On request

** Also available in RGBW version



Controllers/Power Supplies/ Keypads/Softwares



Type	MRP (INR)
Controller, VSM Pro SSD, DVI	On request
Controller, VSM Pro SSD, Composite	On request
Controller, Light System Manager (Gen 5) 15000 Node	On request
Controller, Iplayer 3/Colorplay 3, EU Cable	On request
Controller, Iplayer3 Serial Keypad, White	On request
Controller, Iplayer3 Aux Box, Universal Power	On request
Colordial Pro	On request
Ethernet Switch with POE Ports For Use with Colordial2	On request
Power Over Ethernet Injector W/ EU Line Cord	On request
Controller, iColor Communication Module	On request
iColor Player	On request
Controller, Smartjack Pro	On request
Multi-Protocol Converter	On request
Controller, Activesite Gateway	On request
AntumbraButton Ethernet Keypad Communication Module	On request
AntumbraButton Application Module-Facia (Ordered via Dynalite Codes)	On request

Uniflood

Uniflood C

Uniflood C is a circular shaped, exterior-rated architectural LED floodlight that is designed for façade, landscape and outdoor flood lighting applications like; illuminating multi-story exterior facades, bridges, landmarks and monuments. Available in white, monochromatic colors, RGB, RGBW and tunable white and DMX512/RDM control options.



Type	MRP (INR)
Uniflood C Compact (21W-27W)	On request
Uniflood C Small (27W-36W)	On request
Uniflood C Medium (50W-80W)	On request
Uniflood C large (110W-150W)	On request

Uniflood M

Uniflood M is a modular, rectangular shaped exterior-rated architectural LED floodlight that is designed for façade, landscape and outdoor flood lighting applications like; illuminating multi-story exterior facades, bridges, landmarks and monuments. Available in white, monochromatic colors, RGB, RGBW and tunable white and DMX512/RDM control option.



Type	MRP (INR)
Uniflood M Single Head (40W-144W)	On request
Uniflood M Double Head (160W-290W)	On request
Uniflood M Triple Head (430W)	On request

Uniflood G


Uniflood G is a rectangular shaped exterior-rated architectural LED floodlight that is designed for façade, landscape and outdoor flood lighting applications like: illuminating multi-story exterior facades, bridges, landmarks and monuments. Available in white, monochromatic colors, RGB, RGBW and tunable white and DMX512/RDM control option.



Type	MRP (INR)
Uniflood G Single Head (120W-300W)	On request
Uniflood G Double Head (240W-600W)	On request

UniStrip G4


UniStrip G4 (AC) is a surface mounted, exterior-rated LED linear flood light luminaire that is designed for wall washing and grazing architectural lighting applications like; illuminating buildings facades, bridges, overpasses and any application that requires a linear lighting solution. Available in white, monochromatic colors, RGB, RGBW and tunable white with different lengths (300mm, 500mm, 520m & 1000mm).



Type	MRP (INR)
UniStrip G4 AC BCP383 (15W-50W)	On request
UniStrip G4 AC BCP384 (20W-80W)	On request
UniStrip G4 AC BCP385 (50W-120W)	On request

UniStrip G4 DC

UniStrip G4 (DC) is a surface mounted, exterior-rated LED linear flood light luminaire that is designed for wall washing and grazing architectural lighting applications like; illuminating buildings facades, bridges, overpasses and any application that requires a linear lighting solution. Available in white, monochromatic colors, RGB, RGBW and tunable white with different lengths (300mm, 500mm, 520m & 1000mm).



Type	MRP (INR)
UniStrip G4 DC BCP386(3W-15W)	On request
UniStrip G4 AC BCP381 (6W-24W)	On request
UniStrip G4 AC BCP382 (9W-36W)	On request

UniEdge

UniEdge is a surface mounted, exterior-rated and compact sized architectural LED edge lighting luminaire that is designed for façade and outdoor decorative lighting applications. The robust mechanical and unique optical designs make UniEdge ideal for edges lighting on windows, building façades, landmarks and monuments. Available in white, RGB, RGBW and tunable white.




Type	MRP (INR)
BCP390 4LED RGBNW 24V 3x90 DMX	On request
BCP390 4LED 30K 24V 3x90 DMX	On request
BCP390 4LED 27K 24V 3x90 DMX	On request

Terms & Conditions

- Please choose correct system configuration. (Only Philips employees/authorised value added partners & system integrators should be consulted).
- GST extra as applicable in case of discounts considered on MRP.
- Warranty 1 year against manufacturing defects.
- Installation, testing & commissioning extra as applicable.
- AMC available on request.
- Automatic voltage stabilizer & external SPD is mandatory for all architectural lighting luminaires to claim the warranty.
- The company reserves the right to discontinue / add new variants in the product range.

Make your landmark shine with a swipe on your smartphone


Cloud-based control

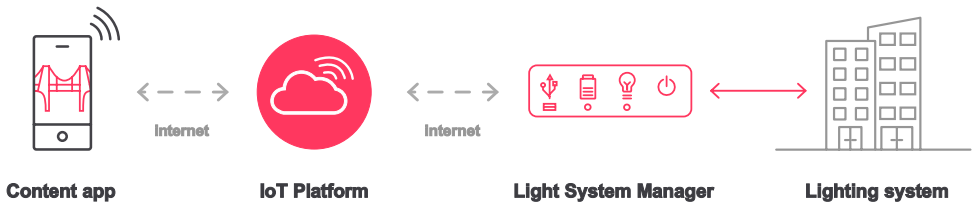





Reference Installations

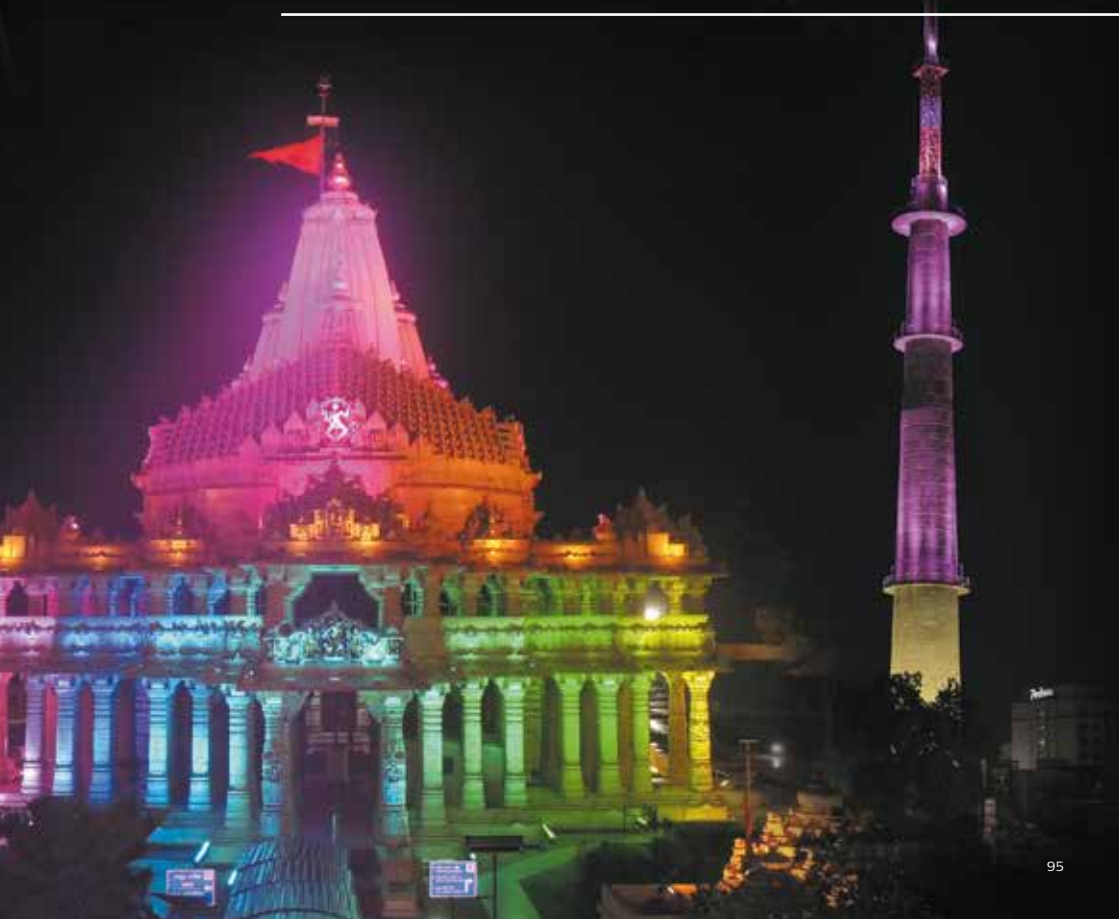

PHILIPS



Solar Lighting

Signify offers a variety of offgrid and hybrid solar propositions catering to the needs of urban, semi-urban as well as rural communities.



Street Lighting
All-in-One



Street Lighting
High Lumen
Non-integral




Street Lighting
Low Lumen
Non-integral



City Beautification



Flood Lighting



PV Panel
Subsystem



Combo Charge
Controllers



Battery
Subsystem



Indoor Systems



Portable Lanterns

Standalone LED Street Lighting System

Ideal for remote, rural and sub urban locations with no electricity. Also suitable for different low wattage, offgrid, solar outdoor applications driven by clean energy initiatives.



SmartBright Solar: Street Lighting Range



Complete system comprises of luminaire with inbuilt charge controller, Battery, PV panel and pole and mounting accessories

Standalone solar lighting system from 900-2100 lumens	94055040	On request
---	----------	------------

* Actual product image may vary depending on the luminaire type / wattages.

GreenLine V2 Solar

Complete system comprises of configurable luminaire with inbuilt charge controller, battery, PV panel and pole and mounting accessories.



Offgrid / Hybrid	HSN Code	MRP (INR)
Standalone solar lighting system from 1600-5000 lumens	94055040	On request

* Actual product image may vary depending on the luminaire type / wattages.

SunStay

Integrated all-in-one solar street light with lithium ferro phosphate battery, solar panel and charger built into the luminaire. Pressure die cast aluminium for sturdiness and long life. Specially designed pole mounting bracket allows different tilt angles, lateral and pole top mounting. SunStay has highest ever system efficacy of more than 175lm/W.



Offgrid	HSN Code	MRP (INR)
BRP710 LED20 CW MR S1 12V LFP AIO Solar Equip IN - with Sensor	94055040	35,000/-
BRP710 LED30 CW MR S1 12V LFP AIO Solar Equip IN - with Sensor	94055040	49,000/-
BRP710 LED45 CW MR S1 12V LFP Solar IN - with Sensor	94055040	70,000/-

CCT option: 3000K and 4000K. Option available without sensor. Option available with fixed dimming profile.

Hybrid SunStay powered by solar energy and at the same time connected to the electric grid. In case of abundant sunlight, it uses solar energy and otherwise it draws energy from the grid.



Hybrid	HSN Code	MRP (INR)
BRP710 LED20 CW MR HY SOLAR IN	94055040	42,000/-
BRP710 LED20 CW MR HY FDIM50 SOLAR IN	94055040	42,000/-
BRP710 LED30 CW MR HY SOLAR IN	94055040	56,000/-
BRP710 LED30 CW MR HY FDIM50 SOLAR IN	94055040	56,000/-
BRP710 LED45 CW MR HY SOLAR IN	94055040	77,000/-
BRP710 LED45 CW MR HY FDIM50 SOLAR IN	94055040	77,000/-
BRP710 LED60 CW MR HY FDIM20 SOLAR IN	94055040	85,000/-

CCT option: 3000K and 4000K

SmartBright All-in-one Solar Street Light

All-in-one solar street light range up-to 12000 lumen with inbuilt lithium ferro phosphate batteries, monocrystalline solar panel and MPPT charge controller.



Offgrid	MRP (INR)
BRP111 LED20/757	34,000/-
BRP111 LED30/757	47,000/-
BRP111 LED50/757	72,000/-
BRP111 LED85/757	92,000/-
BRP111 LED120/757	1,60,000/-

Essential SmartBright Solar Wall light

Outdoor solar wall light with inbuilt lithium ferro phosphate battery, solar panel, inbuilt motion sensor, switch to change modes and LED lights integrated in ABS plastic housing.



Solar Wall Light	HSN Code	MRP (INR)
BWS010 LED50/765	94055040	1,200/-
BWS010 LED100/765	94055040	1,950/-
BWS010 LED300/765	94055040	2,500/-

Essential SmartBright AIO Solar Street Light



Integrated solar street light with Lithium Ferro Phosphate battery, solar panel and charger built into the luminaire. Optional pole mounting bracket. Microwave based motion sensor for optimizing battery autonomy.

AIO - Solar Street Light	HSN Code	MRP (INR)
BRC010 LED10/765	94055040	6,700/-
BRC010 LED10/765 kit(With Wall Mounting Bracket)	94055040	7,900/-
BRC010 LED20/765	94055040	9,800/-
BRC010 LED20/765 kit(With Wall Mounting Bracket)	94055040	11,000/-
BRC010 LED40/765	94055040	12,800/-
BRC010 LED40/765 kit(With Wall Mounting Bracket)	94055040	14,500/-

Essential SmartBright Solar Flood Light



Solar flood lighting DIY kit with lithium ferro phosphate battery built in the luminaire, remote controller and installation accessories included. IP 65 ABS plastic construction for sturdiness and long life.

Solar Flood Light	HSN Code	MRP (INR)
BVC080 LED6/765	94055040	5,750/-
BVC080 LED9/765	94055040	7,000/-
BVC080 LED15/765	94055040	10,500/-

LifeLight/LifeLight Plus



Solar lantern for offgrid communities with mobile charging facility and optional AC charging. By harnessing the abundant energy from the sun, these LED lanterns deliver free and clean lighting along with additional facility to charge mobile phones.

Type	HSN Code	MRP (INR)
Solar Lamp Life Light-WC with USB cable for AC charging	94055040	On request
Solar Lamp Life Light	94055040	On request
LifeLight Plus	94055040	On request

UrbanSpark


UrbanSpark is Integrated solar post top lantern with lithium ferro phosphate battery with vertically mounted panels on all four sides to catch sunlight throughout the day. Choice of street light and post top optics.



Type	HSN Code	MRP (INR)
UrbanSpark post top with 4m integrated pole	94055040	On request
UrbanSpark with 6m integrated pole	94055040	On request

Gen 4.0 Solar Standalone Street Light System: Offgrid and Hybrid

Complete range of configurable and connected solar street lights upto 24000 lumens. Suitable for major, intermediate and minor roads for new points as well as grid connected renovation projects.

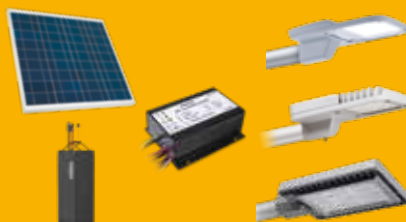

Type	HSN Code	MRP (INR)
System Configurable Option upto 8000 Lumen	94055040	On request
System Configurable Option upto 13000 Lumen	94055040	On request
System Configurable Option upto 24000 Lumen	94055040	On request

Gen 4.0 Solar Standalone Flood Light System: Offgrid and Hybrid

Complete range of configurable and connected solar flood lights upto 15000 lumens. Suitable for major, intermediate and minor roads for new points as well as grid connected renovation projects.



Type	HSN Code	MRP (INR)
System Configurable Option upto 3000 Lumen	94055040	On request
System Configurable Option upto 8000 Lumen	94055040	On request
System Configurable Option Upto 12000 Lumen	94055040	On request
System Configurable Option Upto 15000 Lumen	94055040	On request

PHILIPS





Solar Indoor System

Solar indoor system for communities without access to electricity or with unreliable power supply. By harnessing the abundant energy from the sun, these systems deliver free and clean power to multiple lamps and appliances enhancing the lifestyles of remote communities.



SIS COMPACT



SIS 30




SIS 200

Bright Sites

by  Signify

Smart Poles for Smart Cities

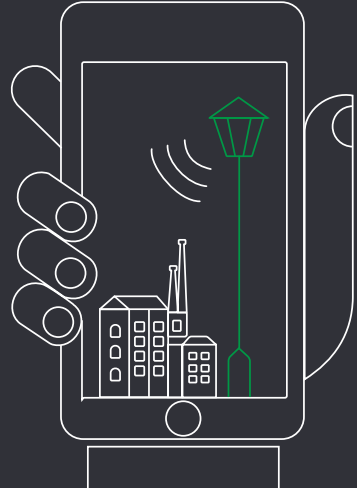

BrightSites H-Series Slim Poles have all you need to improve your city in a single pole.

From enhanced broadband connectivity, surveillance cameras, environmental monitoring with IoT sensors, you can lead the transformation to a smarter, connected, safer and healthier city with the help of BrightSites H-Series Slim Poles.

How BrightSites benefits all



Elegant and multi-functional design BrightSites offer an elegant and aesthetically pleasing multi-functional H-Series Slim Poles. Available in various heights, colors, styles; they enable integration into any streetscape with optimal visual impact.



Digital pathway Using the ubiquity of a city's existing street lighting infrastructure, BrightSites H-Series Slim Poles deliver 4G/5G, Wi-Fi, fiber hubs, mm-wave wireless and option to accommodate wide range of IoT applications.



Easy deployment and scalability Municipalities and mobile network operators can deploy hundreds of smart poles as a standardized solution for cell sites with IoT solutions quickly and easily, making it possible to densify network capacity with a minimal disruption.



Energy Efficiency Signify LED lighting provides a cost-effective, low-maintenance alternative to traditional street lighting.



BrightSites H-Series Slim Poles enable city-wide, future-proof wireless broadband networks by reusing the existing street lighting infrastructure.

BrightSites helps cities meet the needs of citizens, businesses, and visitors by delivering the faster, more available broadband connectivity that helps ensure non-stop access to their digital world. But it delivers these capabilities in an extremely smart, city-friendly solution that leverages the current urban infrastructure, improves efficiency and reduce costs.

Customization

BrightSites H-Series Slim Poles are available in various heights, colors and styles, enabling integration into any streetscape with minimal visual impact. BrightSites H-Series Slim Poles come in standard heights ranging from 4 to 12 meters with flexibility to place the luminaire at different positions and heights on the pole in order to maintain a consistent illumination pattern on the streets.


Connectivity

BrightSites integrates small cell Wi-Fi radios and IoT providing high-speed, high-capacity wireless network access and the optimal urban network coverage that residents, businesses and visitors demand without cell towers, pole attachments or other visual clutter.

Proven Success

Innovative cities already rely on H-Series Slim Poles from Signify to deliver new services and value to residents, businesses and visitors.

For solutions & pricings detail contact Signify representatives

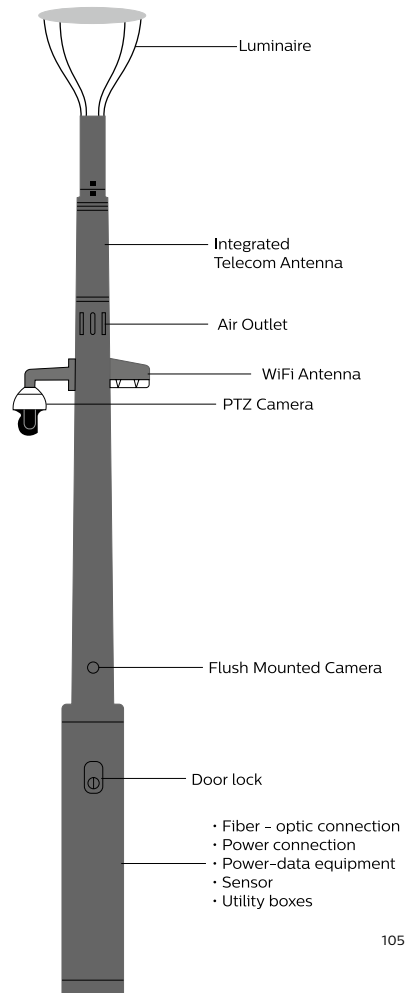

Lighting Controls



Philips Dynalite the intelligent choice

For Connected & Smart buildings, Dynalite is has been tried & tested as of the world's finest lighting control system in more than 30,000 projects. Philips Dynalite has implemented some of the largest and most extensive control networks around the globe. The same robust technology can be used in any application, on any scale.



ENERGY SAVINGS

Automatically detecting occupancy and available natural daylight allows the system to introduce energy savings.



SETTING THE SCENE

Purely aesthetic management of a space.



EASE OF USE

User interface that allows them to get access to such functionality.



INTEGRATION

Ensuring multiple methods of two-way communication with 3rd party systems.



SITE MONITORING


Reporting results and potential solutions via dashboard software.




EASY OF INSTALLATION

Din Rail Mounted/Wall Mounted controllers.

Dynalite Ecosystem

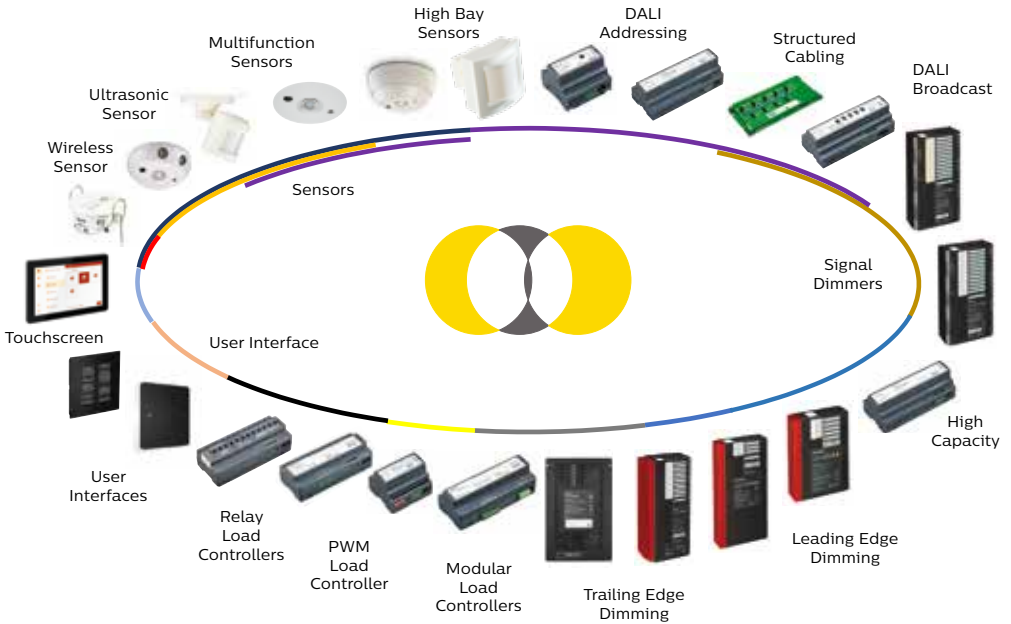

Multilingual-Integration

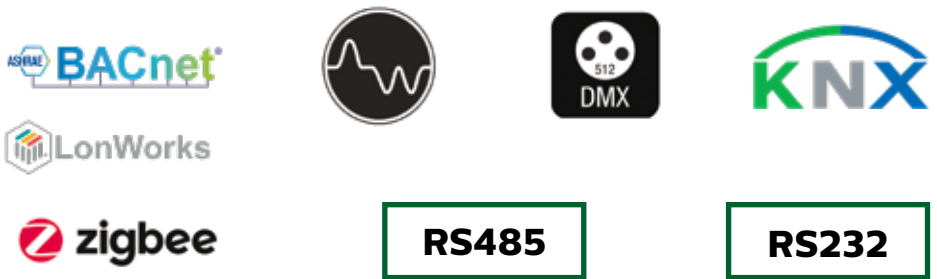

In-house Software Suite



System Manager

End user software & dashboard



System Builder

Configuration & software tool



Control App

Mobile control

Network Lighting Controls

Philips Dynalite creates sophisticated, reliable, and energy-efficient lighting control solutions for residential, offices, retail, hospitality, industry, stadiums, public spaces, and more.

Type	
DDBC120-DALI MultiMaster DALI Driver Controller	 
DDBC320-DALI DALI Driver Controller	
DDBC516FR Signal Dimmer Controller	
DDRC420FR Relay Controller	
DDRC1220FR-GL Relay Controller	
DDLE802 Leading Edge Dimmer Controller	
DDMC802 Multipurpose Modular Controller	
DUS360CR Multifunction Sensor	 
DUS804CS-UP Multifunction Sensor Ultrasonic	
DUS90AHB-DALI Multifunction Sensor -Aisleway high bay DALI network sensor	
SNS401CMP Wireless Group Controller	
Antumbra Button/ Touch/Display Keypad	 
PDTS Networked Touchscreen	
PDEG Ethernet Gateway	
DDNG-BACnet BACnet Network Gateway	
PDZG-E ZigBee Gateway	 
DLI18180 Dry Contact Interface	
DDFCUC010 Fan Coil Unit Controller	

Standalone Controls

OccuSwitch is a movement detector with a build-in switch. It will switch off the lights in a room or area when it is vacated and thus save energy. It can switch any load up to 6 A and control an office area of around 20sqm for small movement (e.g. desk work) and around 50sqm for large movement (e.g. walking). It is smart daylight sensing technology offers additional saving through daylight override and daylight switching.



Type	MRP (INR)
LRM1071/10 - OccuSwitch Movement Detector	4,000/-
LRM1061/00 OccuSwitch Surface Mount	4,500/-



Education

Setting the lighting to match the lesson



Hospitality

Monitoring power consumption and creating a lighting scenes



Boardroom control

Adjusting for meeting, presentation, discussion



Open office

In tune with occupancies natural Biorhythms

Terms & Conditions

- Price for network controls can be shared on request
- Please choose correct system configuration/Components for Network controls. (Only Philips Employees/Authorised Value Added Partners & System Integrators should be consulted).
- GST Extra as applicable in case of discounts considered on MRP.
- Warranty 1 year against manufacturing defects.
- Installation, Testing & Commissioning Extra as applicable.
- AMC available on request.
- The company reserves the right to discontinue/add new variants in the product range.



Disinfection UV-C Range

Air Purifier with UV-C Technology


Philips Air Purifier With UV-C Technology is a unique purifier which in addition to purifying the air also disinfects it from all pathogens with UV-C technology.



Type	MRP (INR)
UVCA210 Air Disinfection unit W HE-17	59,999/-
UVCA110 Air Disinfection unit W HE-17	39,999/-

Upper Air Luminaires

Upper Air Luminaires provide a very effective disinfection mechanism for indoor environments by continuously disinfecting the air while work continues in the offices/indoor environments from all known pathogens using UV-C technology.

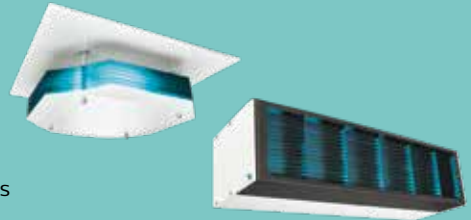

Type	MRP (INR)
WL345W C 1xTUV T5 25W HFS IN	60,000/-
SM345C C 4xTUV PLS 9W HFM IN	70,000/-

UV-C Trolleys

UV-C Trolleys provide a portable surface disinfection solution for offices and other indoor environments. It comes with options of high intensity trolley for fast disinfection in large indoor environments and smaller options with single/ double arm options ideal for smaller rooms in applications like hotels and other small areas.



Type	MRP (INR)
UVCT1200 432W IN	1,50,000/-
UVCT100 70W 04	32,000/-
UVCT200 140W 04	64,000/-



PHILIPS

VERSACE

VERSACE





LED Lamps

Philips TrueForce LED Road

Philips TrueForce LED Road is the world's first direct (Plug&Play) replacement SON-T LED lamp for street lighting, making it easy to upgrade existing installations to LED without a need to rewire or change a luminaire. It is the simplest way to start saving on energy consumption and improve light quality, while keeping your initial investment low.



Type	HSN Code	MRP (INR)
TForce LED Road 58-35W E27 730	9290	On request
TForce LED Road 60-35W E27 740	9290	On request

Philips TrueForce LED Industrial and Retail Highbay Retrofit Lamps

Philips TrueForce LED Industrial and Retail (Highbay – HPI/SON/HPL) lamps give you a quick and easy payback solution to replace HID lamps in Highbay application. The solution gives you the LED benefits of energy-efficiency and long-lifetime, plus they come for a low initial investment. Lamp design allows retrofit HID lamps with TrueForce LED lamp with no gear loss and high power factor. Multiple beam angle options and high color rendering index enhance the lighting distribution while creating a comfortable, safe and high productivity environment.



Type	HSN Code	MRP (INR)
TForce HB 140W E40 840 NB GM	9290	9,999/-
TForce HB 140W E40 840 WB GM	9290	9,999/-
TForce HB 140W E40 865 NB GM	9290	9,999/-
TForce HB 140W E40 865 WB GM	9290	9,999/-

Philips TrueForce Core LED Industry and Retail (Highbay– HPI/SON/HPL) Lamps

Philips TrueForce Core LED Industry and Retail (Highbay– HPI/SON/HPL) lamps give you a quick and easy payback solution to replace HID/CFLi lamps in industrial application. The solution gives you the LED benefits of energy-efficiency and long-lifetime, plus they come for a low initial investment. Lamp design allows to replace HID/CFLi lamps with no gear loss and high power factor.



Type	HSN Code	MRP (INR)
TForce Core HB 26-30W E27 830	9290	On request
TForce Core 27W/3000lm B22	9290	799/-
TForce Core 27W/3000lm E27	9290	799/-
TForce Core HB 28-30W E27 840	9290	On request
TForce Core 37W/4000lm B22	9290	1,099/-
TForce Core 37W/4000lm E27	9290	1,099/-
TForce Core HB 40-40W E27 840	9290	On request
TForce Core HB 40-40W E27 865	9290	On request
TForce Core 47W/5000lm B22	9290	1,399/-
TForce Core 47W/5000lm E27	9290	1,399/-
TForce Core HB 48-50W E27 830	9290	On request
TForce Core HB 50-50W E27 840	9290	On request
TForce Core HB 50-50W E27 865	9290	On request
TForce Core HB 48-50W E40 830	9290	On request
TForce Core HB 50-50W E40 840	9290	On request
TForce Core HB 50-50W E40 865	9290	On request
TForce Core HB 70-65W E40 840	9290	On request
TForce Core HB 70-65W E40 865	9290	On request
TForce Core HB 85-67W E40 865	9290	4,999/-
TForce Core HB 90-80W E40 840	9290	On request
TForce Core HB 90-80W E40 865	9290	On request

Accessories for TForce Core LED HID Range



Type	HSN Code	MRP (INR)
TForce E27 lamp holder	9290	1,000/-
TForce E40 lamp holder	9290	1,100/-
TForce 12inch lamp reflector	9290	1,450/-
TForce 16inch lamp reflector	9290	1,800/-

True Force Post Top Lamps

Philips TrueForce LED lamps provide an easy LED solution with a fast payback to replace High-Intensity Discharge (HID) lamps. These lamps bring the energy efficiency and long lifetime benefits of LED to HID replacement, with a low initial investment delivering instant savings. With the right lamp size and light distribution, customers can easily retrofit TrueForce LED lamps into their existing system, thereby enhancing the light quality without having to change the fixtures or sacrifice the light effect.



Type	HSN Code	MRP (INR)
TForce LED HPL ND 44-33W E27 740 FR	9290	3,499/-
TForce LED HPL ND 48-33W E27 740 CL	9290	3,499/-

LED PL-L 18W

Cost effective and easy way to move to LED without changing the 2'x2' conventional fittings.

Type	HSN Code	MRP (INR)
LED PL-L 18W, 6500K 2G11	9290	599/-



Essential LEDspots MR16/GU10 Lamps

Essential LEDspots MR16/GU10 are compatible with most existing fixtures with a GU5.3 socket and are designed as a retrofit replacement for halogen spots. Essential LEDspots MR16/GU10 deliver significant energy savings and minimize initial investment.



Type	HSN Code	MRP (INR)
Essential LED 4.6-50W GU10 827 36D	9290	299/-
Essential LED 4.6-50W GU10 830 36D	9290	299/-
Essential LED 4.6-50W GU10 865 36D	9290	299/-

Master LEDspot ExpertColor MV Range

Master LEDspot MV ExpertColor creates a warm and comfortable ambience for hospitality venues, homes and restaurants. It creates ambience with superior lighting that has a customised spectrum, high CRI and deep dimming features. The result being a beautiful lighting experience. The innovative, trimless lens design will also suit almost any interior decor with its clean and neat look. In addition, you can take advantage of the full ExpertColor family, which also includes LEDspot LV and LEDspot Par lamps.



Type	HSN Code	MRP (INR)
MAS LED MR16 ExpertColor 6.7-50W 927 10D	9290	1,699/-
MAS LED MR16 ExpertColor 6.7-50W 930 10D	9290	1,699/-
MAS LED MR16 ExpertColor 6.7-50W 940 10D	9290	1,699/-
MAS LED MR16 ExpertColor 6.7-50W 927 24D	9290	1,699/-
MAS LED MR16 ExpertColor 6.7-50W 930 24D	9290	1,699/-
MAS LED MR16 ExpertColor 6.7-50W 940 24D	9290	1,699/-
MAS LED MR16 ExpertColor 6.7-50W 927 36D	9290	1,699/-
MAS LED MR16 ExpertColor 6.7-50W 930 36D	9290	1,699/-
MAS LED MR16 ExpertColor 6.7-50W 940 36D	9290	1,699/-
MAS LED MR16 ExpertColor 6.7-50W 927 60D	9290	1,699/-
MAS LED MR16 ExpertColor 6.7-50W 930 60D	9290	1,699/-
MAS LED MR16 ExpertColor 6.7-50W 940 60D	9290	1,699/-

LED GU10 Kits

LED GU10 KITS are a perfect for spot lighting and deliver warm halogen-like light.



Type	HSN Code	MRP (INR)
LED 50W GU10Kit_R 827 36D	9290	470/-
LED 50W GU10Kit_R 840 36D	9290	470/-
LED 50W GU10Kit_R 865 36D	9290	470/-
LED 50W GU10Kit_S 827 36D	9290	470/-
LED 50W GU10Kit_S 840 36D	9290	470/-
LED 50W GU10Kit_S 865 36D	9290	470/-

Essential LEDspots MR16/GU10 Lamps

Essential LEDspots MR16/GU10 are compatible with most existing fixtures with a GU5.3 socket and are designed as a retrofit replacement for halogen spots. Essential LEDspots MR16/GU10 deliver significant energy savings and minimise initial investment.



Type	HSN Code	MRP (INR)
ESS LED MR16 4.5-50W 36D 830 100-240V	9290	299/-
ESS LED MR16 4.5-50W 36D 865 100-240V	9290	299/-
Essential LED 4.6-50W GU10 827 36D	9290	299/-
Essential LED 4.6-50W GU10 830 36D	9290	299/-
Essential LED 4.6-50W GU10 865 36D	9290	299/-



Master LED PAR30L

Philips PAR30S LED single optic lamps with AirFlux technology provides superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.



Type	HSN Code	MRP (INR)
Master LED PAR30L 20W 15D/30D 830/840	9290	1,299/-
Master LED PAR30L 32W 15D/30D 830/840/857	9290	1,999/-
Master LED PAR30L 40W 15D/30D 827/830/840/857	9290	1,999/-



LEDTube Range

LED tube range integrates LED light source with frosted cover design into traditional linear fluorescent form delivering 50%* energy saving.



Essential LEDTube Range	HSN Code	MRP (INR)
Essential LEDTube 1200mm 20W865 T8 IND I – 2100lm	8539	400/-
Essential Led tube 20W B2B 865 T8	8539	450/-

Master LEDTube Range	HSN Code	MRP (INR)
Mas LEDTube 9W, 900lm, 865 T8	8539	-
Mas LEDTube 1200mm, 13W865 T8 I IN30 - 1600lm	8539	700/-
Mas LEDTube 18W, 2100lm 865 T8 (VE)	8539	800/-
Mas LEDTube 1200mm 18W865 T8 I - 2100lm	8539	800/-
Mas LEDTube 18W 2100lm Kit with Batten	8539	-
Mas LEDTube 1200mm 18W865 TEX	8539	800/-
Mas LEDTube 18W, 865 T8 I - 1800lm	8539	700/-
Mas LEDTube 1200 mm 18W 840 T8 I W	8539	-
Mas LEDtube 30W, 4000lm, 865 T8	-	1,300/-
Mas LEDtube 30W, 4000lm, 865 T8 with Batten	-	1,500/-

MasterConnect LEDTube

Philips MasterConnect LEDTube EM/Mains T8 means easy upgrade to a connected lighting system. Its 2.4GHz mesh networking technology enables wireless integration with a variety of control devices, such as sensor and switch. The result? Even more energy saving and enhanced flexibility in your space. Through dimming, occupancy sensing and/or daylight harvesting, lamps deliver up to 85% energy saving thanks to MasterConnect technology.



Master LEDTube Range	HSN Code	MRP (INR)
MAScon LEDTube IA 1200mm UO 16.5W830 T8 - 2300 lm	-	3,700/-
MAScon LEDTube IA 1200mm UO 16.5W840 T8 - 2300 lm	-	3,700/-
MAScon LEDTube IA 1200mm UO 16.5W865 T8 - 2300 lm	-	3,700/-



Connected



3000/4000/6500



50,000 hours



Wireless Dimmable



Beam angle



Rotatable (ROT)



CRI



G13 cap

Abbreviation

1. Product family code

SP780P | RC380B | DN295B | RS271B
 ST391T | BY325P | BN308C | BRP409
 | BVP621 | BGP400 |BRP710

2. System output

LED100S: 10,000 Lumen
 LED130S: 13,000 Lumen
 LED160S: 16,000 Lumen

3. Color temperature

CW/CDL: 6500K/5700K
 NW:4000K
 WW:3000K

4. Optics (Indoor)

NB: Narrow Beam 60°
 WB: Wide beam 110°
 SK: Symmetric beam
 AK: Asymmetric beam

5. Optics (Outdoor Product)

MR: Optics for Main Road
 NR: Optics for Narrow Road
 SLA: Street Light Optics A Class
 SLC: Street Light Optics C Class
 SWB: Symmetric Wide Beam
 AWB: Asymmetric Wide Beam
 NB: Narrow Beam
 SY20: Symmetric beam 20 Degree
 AK: Asymmetric Beam

6. Optics (Retail)

NB: Narrow Beam
 MB: Medium Beam
 WB: Wide Beam

7. Controls

PSU: Fixed output
 PSD: DALI Dimmable
 PSR: 0-10 Analog Dimmable

8. Phase:

1C: Single Circuit
 3C: Triple Circuit

9. Variant

V1: Version 1
 V2: Version 2

10. Width (Appx. Dimension)

W6: 60mm Width
 W7: 70mm Width
 W30: 300mm width
 W60: 600mm width

11. Length (Appx. Dimension):

L120: 1200mm length
 L60: 600mm Length
 L30: 300mm length
 L1000: 1000mm length
 L2000: 2000mm length

12. Front Cover

FG: Toughened Extra clear flat glass
 PC: Polycarbonate cover
 OD: Opal diffuser
 OA: Opal Acrylic

13. Luminaire Color

SI: Silver color
 GR: Grey color
 WH: White color
 BK: Black color



PHILIPS

PHILIPS

Sd

South

CHENNAI

Signify Innovations India Limited
3rd Floor, C-Block, Sunny Side, Shafee
Mohammed Road, Off Greams Road
Chennai - 600 006
Tel: 044 66074000/4020

BANGALORE

Signify Innovations India Limited
Mfar Greenheart, Level 7, Manyata Tech
Park, Hebbal Outer Ring Road,
Bangalore - 560045
Tel: 080 67819730

HYDERABAD

Signify Innovations India Limited
Level 1, MB Towers, Road No 10,
Banjara Hill, Hyderabad - 500034
Tel: 040 46464828

East

KOLKATA

Signify Innovations India Limited
PS Arcadia Central, 3A, 3rd Floor,
4A, Abanindranath Thakur Sarani
(Camac Street) Kolkata - 700017
Tel: 033 66297000

West

MUMBAI

Signify Innovations India Limited
Boomerang, B2 Wing,
5th Floor, Unit No. 506,
Chandivali Farm Road,
Near Chandivali Studio,
Andheri (East), Mumbai - 400072
Tel: 91 22 6691 2000

AHEMDABAD

Signify Innovations India Limited
Flexi Business Hub
201, 2nd floor, Madhu complex,
Opposite Gwalia sweet,
Near Sardar Patel Stadium,
Navrangpura, Ahmedabad,
Gujarat - 380009
Tel: 9375239966

North

GURGAON

Signify Innovations India Limited
9th Floor, DLF - 9B, DLF Cyber City
DLF Phase 3, Gurgaon - 122002
Tel: 91 124 460 6000

For any lighting service request you can reach out through

Toll-free Number: 1800 103 5977

SMS: Send 'COMP' to 56363 - Our representative will call back

Email: lighting.india@philips.com or

Chat & Mail: www.lighting.philips.co.in - Support/Contact us/Chatnow/Email



© 2019 Koninklijke Philips N.V. All rights reserved.
Reproduction in whole or in part is prohibited. Owing to continuous
innovation and improvement, Philips India reserves the right to make
changes in the data/details without prior notice. Care has been taken to
ensure that the information contained within is correct.